

Annual Public School Inspections



**Illinois
State Board of
Education**

John Runge



Dave Demler at ROE #26



**OFFICE OF THE ILLINOIS
STATE FIRE MARSHAL**

Cathy Stashak
Jeff Rath

Qualified Fire Official

QFO = Qualified Fire Official



Certificates of Completion

Tier 1 students will get their certificates of completion today and will be added to our QFO list ASAP.

Tier 2 students will get their certificates and be added to our QFO list when they submit their “shadowing” confirmation letter to Kensie at our Springfield office.

Certificates of Completion

Tier 2 students should check our QFO list that is posted on our website and anybody with an (*) next to their name is able to act as a “mentor” for an inspector that is shadowing to become a QFO.

History

It was the tragic fire at the Our Lady of the Angels school in 1958 that led to the establishment of the Code drafting committee for the first Health/Life Safety Code.



History

A 2003 amendment to an Illinois State statute authorizes the Office of the State Fire Marshal (OSFM) or a “qualified fire official to whom OSFM has delegated his or her authority” to conduct safety checks.

105 ILCS 5/2-3.12

41 IL Admin Code Part 111

History

After the rule was passed, ISBE and OSFM collaborated to review the existing inspection Checklist and Glossary and to provide training for ISBE administrators, OSFM inspectors and fire service inspectors.

Goals and Objectives

The purpose of this effort is a collaboration between ISBE and the Illinois Fire Service. It is meant to be beneficial and cooperative. The fire service can educate the ISBE staff and bring in their experience and the ISBE staff provides enlightenment from their unique perspective of school age children.

Policy

If the local fire department that has fire jurisdiction over the school(s) does not have the staffing or expertise to perform these inspections, OSFM inspectors will perform this inspection.

Policy

This is a mandatory inspection so if the local fire department decides they cannot perform these inspections anymore, please, please, please let the OSFM know. The schools will be transferred to OSFM inspection scheduling.

Policy

Only OSFM provides the training that “qualifies” fire department or fire protection district personnel to perform these inspections.

OSFM also provides this same training to their own inspectors.

Policy

Inspections do not have to be performed with ROE staff, but the intent of this program is to be collaborative. So whenever possible the best approach is to work with the local ROE.

Either way the ROE must be notified prior to starting inspections

ROE = Regional Office of Education

Policy

According to Illinois Administrative Code this is only an “advisory” inspection.

The rules do not require the fire service inspector (whether local or OSFM) to conduct a re-inspection.

Policy

If the local inspector is having problems getting the school or ROE to bring the violations into compliance (over the course of a couple of years), the Part 111 rules require OSFM to act as the liaison between ISBE/ROE and the fire service inspector.

Policy

Conditions that present an imminent danger must be corrected immediately.

41 IL Admin Code Part 111.90(c)

425 ILCS 25/9

Policy

Inspection reports must be returned to the ROE within **15 calendar days** of the inspection and to OSFM using the procedure on the following slides.

Policy

Inspection reports must NOT be left at the school OR with the school district.

The Cook County exception is explained on a later slide.

[105 ILCS 5/3-14.21(c)] [Title 41 Ill. Adm. Code 111.90(b)]

Policy

If you are walking with ROE staff during this inspection, you must write up your own independent report! You cannot co-sign the ROE's written report. There must be a separate report from you, the inspector, sent to the ROE and to OSFM.

Policy

Cook County Intermediate Service Centers do NOT have to be notified prior to starting inspections.

For public schools in **Cook County only**, within **15** calendar days make sure to:

- Leave a copy of your report at the school
- Submit a copy of your report to the assigned Cook County Intermediate Service Center
- Submit a copy to OSFM

Policy

YOU MUST USE AN UPDATED APPROVED INSPECTION FORM THAT IS DISCUSSED IN THIS CLASS WHEN YOU PERFORM THESE INSPECTIONS.

You are not permitted to use your own fire department inspection forms!

Report Submittal

Report submittals to OSFM are done using OSFM's Mobile Eyes platform.

Submittals to the Regional Office of Education or the Intermediate Service Center (Cook County schools) are an independent submittal directly to the ROE/ISC.

Uploading Inspections to OSFM Portal

The FIRST person to create an account linked to your fire department will be the Portal Administrator.

That person controls the privileges that the rest of the people have. As people create portal accounts linked to your fire department, they will not be able to do or see anything until the Administrator grants them privileges.

Uploading Inspections to OSFM Portal

The Administrator can also grant administrative rights to other users.

If your administrator is to leave the department they will need to grant administrative rights to another user.

Uploading Inspections to OSFM Portal

Additional information on Administrator rights can be found in the Help Video “How to Use Admin Tools.”



Uploading Inspections to OSFM Portal


There have been problems registering your fire department. This is often because of the server on the Mobile Eyes side of the system. If it takes you more than five minutes to register please contact the OSFM Administrative Assistant for help. (Contact information is provided in a later slide).

Inspection Portal Procedures: Accounts and Logging In

Open a browser (Internet Explorer, Chrome, Safari, etc.) and go to www.mobile-eyes.com.

Click “Login”

Note: Steps 6 thru 8 are only required for the Portal Administrator.

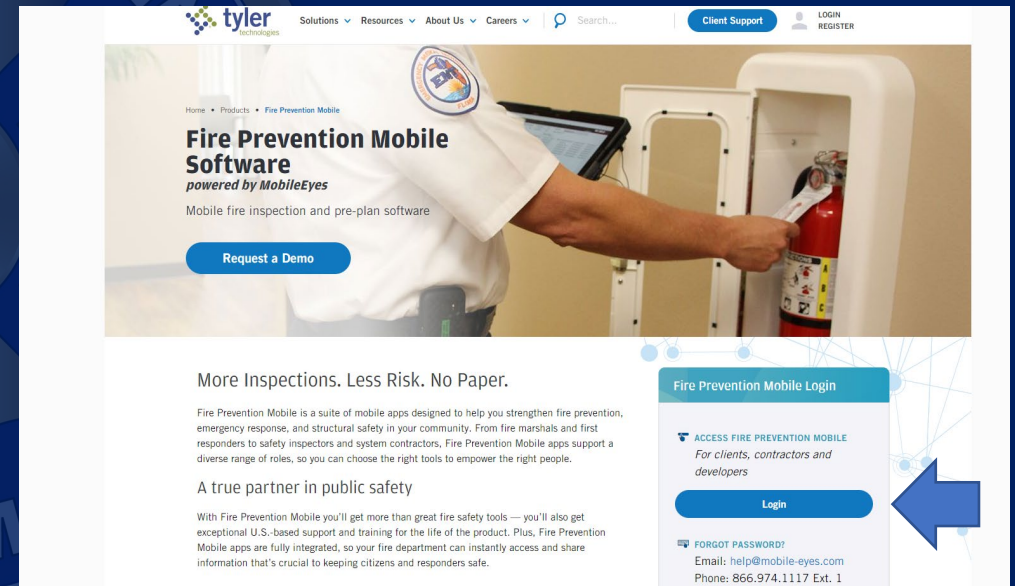

Inspection Portal Procedures: Accounts and Logging In

Select:

Contractor, architect, or business owner


AND

Submit a system inspection report

Click "Next"


Inspection Portal Procedures: Accounts and Logging In

Click "Create Account"

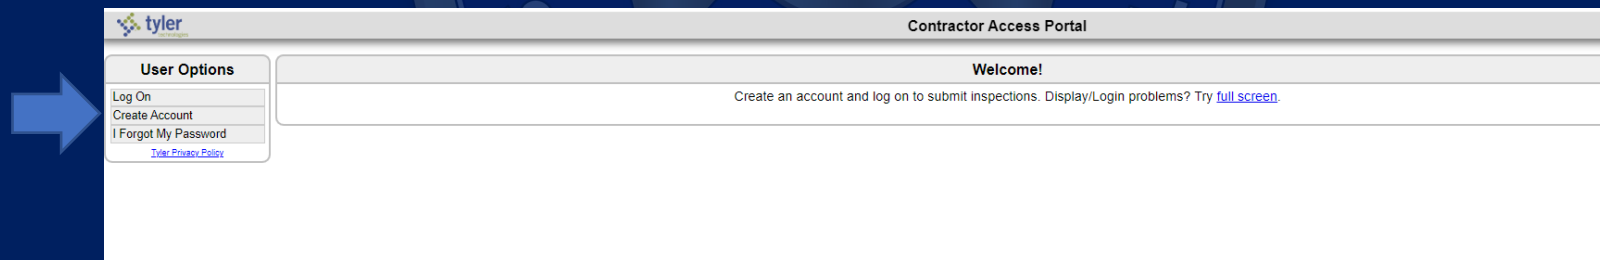

Inspection Portal Procedures: Accounts and Logging In

Enter your email address
and the human recognition
test. Then click
“Continue.”

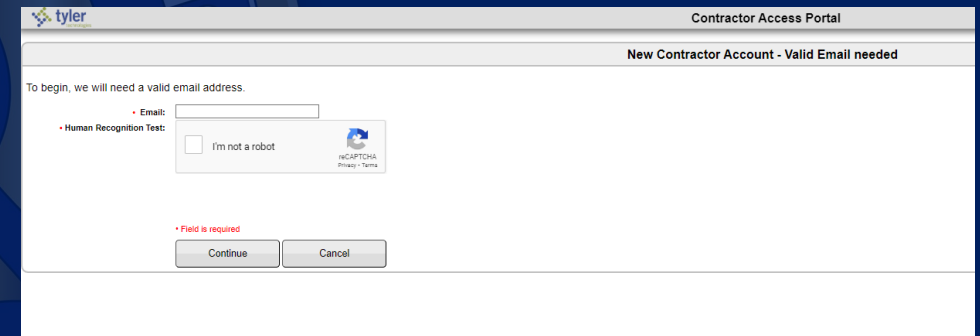

The screenshot shows a web browser window titled "Contractor Access Portal" with a sub-header "New Contractor Account - Valid Email needed". The page content includes the text "To begin, we will need a valid email address." followed by an "Email:" label and an empty text input field. Below this is a "Human Recognition Test:" section with an unchecked checkbox labeled "I'm not a robot" and a reCAPTCHA logo. A red error message "Field is required" is positioned above the "Continue" and "Cancel" buttons at the bottom of the form.

Inspection Portal Procedures: Accounts and Logging In

Enter your department name in the "Business Name" box. As you type, it will look for matches to existing departments. This is in case a department has multiple people setting up accounts.

New Contractor Account

Business

Business Name: Village of Troy Fire Rescue Enter your business name and we'll search for a match. Select match or create new.
No matches

Select existing business or

Contractor

Name:

Phone (Desk Phone): You can add more phone numbers later.

Phone (Cell):

Phone (After Hours):

Email: tgorman111@gmail.com

Personal Fax:

Password: Must be between 6 and 20 characters.

Confirm Password: This must match the value in the password field exactly.

License #s

Lic. #	Lic. Description	Effective Date	Expire Date
<input type="text"/>	<input type="text"/>	<input type="text"/> Clear	<input type="text"/> Clear
<input type="button" value="New Lic. #"/>			<input type="button" value="Delete"/>

Field is required

Inspection Portal Procedures: Accounts and Logging In

If you see your department pop up in the suggestions, click on it. If not, click "Create New Business."

New Contractor Account

Business

Business Name: Village of Troy Fire Rescue Enter your business name and we'll search for a match. Select match or create new.
No matches

Select existing business or

Contractor

Name:

Phone (Desk Phone): You can add more phone numbers later.

Phone (Cell):

Phone (After Hours):

Email: tgorman111@gmail.com

Personal Fax:

Password: Must be between 6 and 20 characters.

Confirm Password: This must match the value in the password field exactly.


Licenses

Lic. #	Lic. Description	Effective Date	Expire Date
<input type="text"/>	<input type="text"/>	<input type="text"/> Clear	<input type="text"/> Clear
<input type="button" value="New Lic. #"/>			<input type="button" value="Delete"/>

Field is required

Inspection Portal Procedures: Accounts and Logging In

Enter the address and phone information for your department.

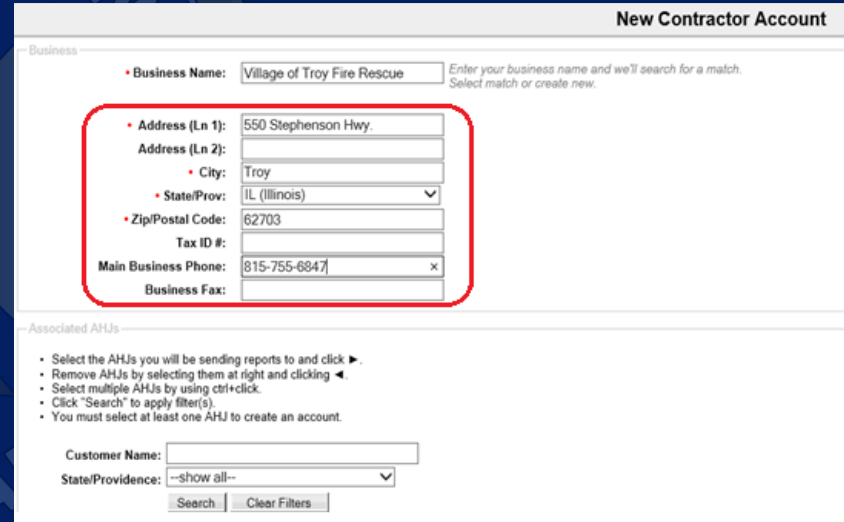

New Contractor Account

Business

• **Business Name:** Village of Troy Fire Rescue Enter your business name and we'll search for a match. Select match or create new.

• **Address (Ln 1):** 550 Stephenson Hwy.

Address (Ln 2):

• **City:** Troy

• **State/Prov:** IL (Illinois)

• **Zip/Postal Code:** 62703

Tax ID #:

Main Business Phone: 815-755-6847

Business Fax:

Associated AHJs

- Select the AHJs you will be sending reports to and click ►.
- Remove AHJs by selecting them at right and clicking ◀.
- Select multiple AHJs by using ctrl+click.
- Click "Search" to apply filter(s).
- You must select at least one AHJ to create an account.

Customer Name:

State/Providence: --show all--

Search Clear Filters

Inspection Portal Procedures: Accounts and Logging In

Find “Office of the Illinois State Fire Marshal” in the “Available AHJs” list and click to select.

Associated AHJs

- Select the AHJs you will be sending reports to and click ►
- Remove AHJs by selecting them at right and clicking ◀
- Select multiple AHJs by using ctrl+click.
- Click “Search” to apply filter(s).
- You must select at least one AHJ to create an account.

Customer Name:

State/Province:

Available AHJs

Greenfield Fire Territory (IN)	
Howard County DFRS (MD)	
Indianapolis Fire Department (IN)	
Iona McGregor Fire Protection (FL)	
Miffiin Township (OH)	
Office of Illinois State Fire Marshal (IL)	<input checked="" type="checkbox"/>
Pike Township Fire Department (IN)	
Plainfield Fire Territory (IN)	
Rutgers University (NJ)	
Van Buren Township FD (MI)	

Selected AHJs

Inspection Portal Procedures: Accounts and Logging In

Click the arrow to move it to the
"Selected AHJs" list.

Associated AHJs

- Select the AHJs you will be sending reports to and click ►.
- Remove AHJs by selecting them at right and clicking ◀.
- Select multiple AHJs by using ctrl+click.
- Click "Search" to apply filter(s).
- You must select at least one AHJ to create an account.

Customer Name:

State/Providence:

Available AHJs		Selected AHJs
Greenfield Fire Territory (IN)		Office of Illinois State Fire Marshal (IL)
Howard County DFRS (MD)		
Indianapolis Fire Department (IN)		
Iona McGregor Fire Protection (FL)		
Mifflin Township (OH)		
Office of Illinois State Fire Marshal (IL)		
Pike Township Fire Department (IN)		
Plainfield Fire Territory (IN)		
Rutgers University (NJ)		
Van Buren Township FD (MI)		

Inspection Portal Procedures: Accounts and Logging In

Enter your personal information. Ignore the License section. This pertains to contractors using the portal, not to you.

Contractor

• Name: Tom Gorman

Phone (Desk Phone): 815-974-1117 You can add more phone numbers later

Phone (Cell): 815-395-2894

Phone (After Hours):

Email: tgorman111@gmail.com

Personal Fax:

• Password: Must be between 6 and 20 characters.

• Confirm Password: This must match the value in the password field exactly.

License #s


Lic. #	Lic. Description	Effective Date	Expire Date
<input type="text"/>	<input type="text"/>	<input type="text"/> <input type="button" value="Clear"/>	<input type="text"/> <input type="button" value="Clear"/>
<input type="button" value="New Lic. #"/>			

• Field is required

Click “Continue”

Inspection Portal Procedures: Accounts and Logging In


At this point an email is sent to the email address you provided. Find that email and follow the instructions in it to verify your email address.

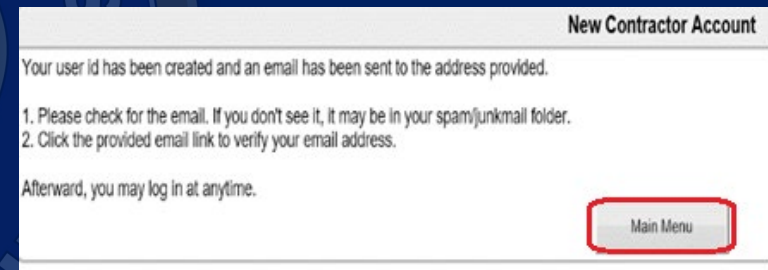

Once you have verified your email address, click "Main Menu."

Inspection Portal Procedures: Accounts and Logging In

Click “Log On”

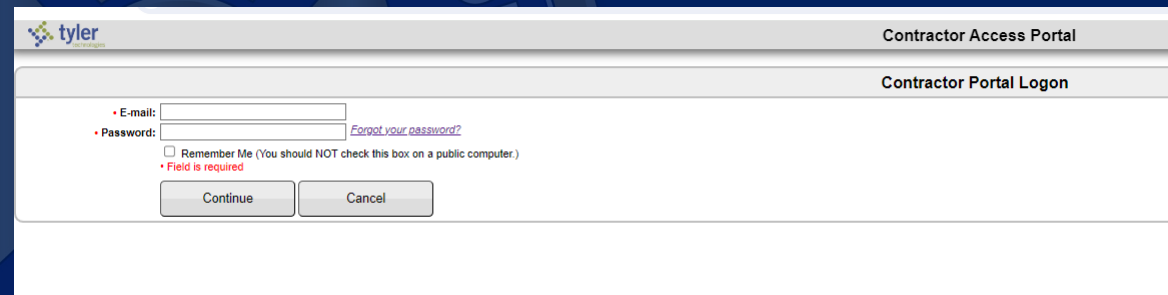

The screenshot shows a web browser window displaying the Tyler Contractor Access Portal. The page title is "Contractor Access Portal" and the main heading is "Contractor Portal Logon". The login form includes the following elements:

- E-mail:** A text input field.
- Password:** A text input field with a "Forgot your password?" link to its right.
- Remember Me (You should NOT check this box on a public computer.)
- A red error message: "Field is required" (likely referring to the password field).
- Two buttons: "Continue" and "Cancel".

Inspection Portal Procedures: Accounts and Logging In

Enter your email and the password you created. Check the "Remember Me" box. Then click "Continue."




The screenshot shows a web form titled "Contractor Portal Logon". It contains the following elements:

- An "E-mail" field with the text "tgorman111@gmail.com" and a small "x" icon to clear the field.
- A "Password" field with masked characters (dots) and a "Forgot your password?" link.
- A "Remember Me" checkbox that is checked, with the text "(You should NOT check this box on a public computer.)" next to it.
- A red asterisk and the text "Field is required" below the password field.
- Two buttons at the bottom: "Continue" and "Cancel". The "Continue" button is highlighted with a red rectangular box.


Inspection Portal Procedures: Accounts and Logging In

For further help and instructions on how to use the portal, please watch the “Help Videos” available on the main menu.

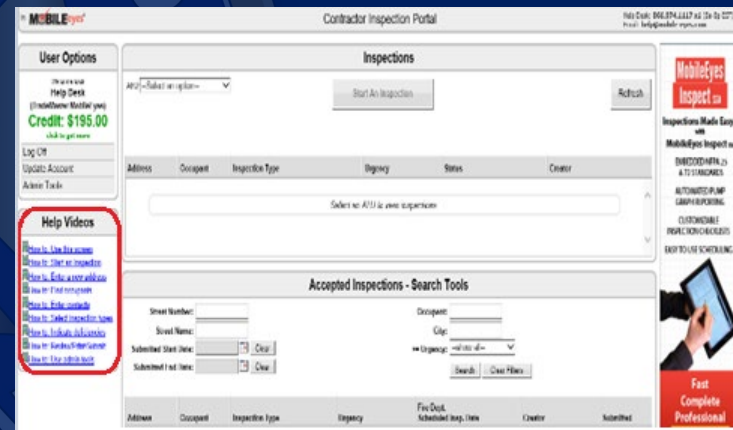

Inspection Portal Procedures: Accounts and Logging In

If you have questions or run into a problem, please call or email the MobileEyes Help Desk. The Help Desk information is in the upper right corner.

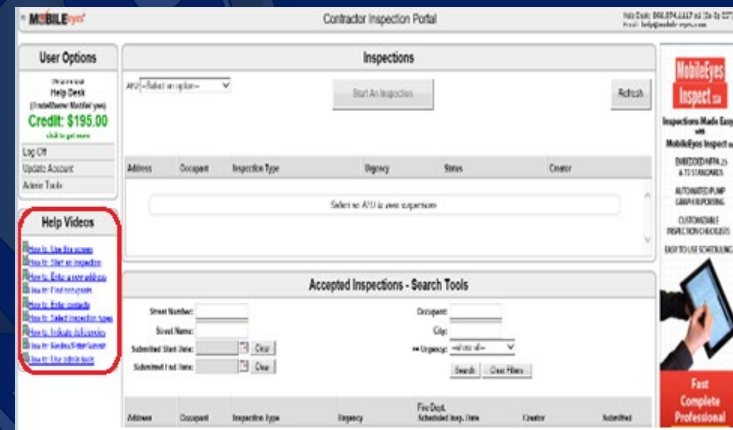

Inspection Portal Procedures: Accounts and Logging In

Even though this screen shot shows credits, the OSFM is paying for the portal. There is no cost to you.


The screenshot displays the 'Contractor Access Portal' interface. On the left, the 'User Options' sidebar includes a 'Credit: \$0.00' indicator, 'Log Off', 'Update Account', 'Admin Tools', and 'Help Videos'. The main content area is divided into two sections: 'Inspections' and 'Accepted Inspections - Search Tools'. The 'Inspections' section features a dropdown menu for 'AFJ' and buttons for 'Submit An Inspection' and 'Submit A Dispute'. Below this is a table with columns for 'Address', 'Occupant', 'Inspection Type', 'Urgency', 'Status', and 'Creator'. The 'Accepted Inspections - Search Tools' section includes search filters for 'Street Number', 'City', 'Urgency', 'Submitted Start Date', and 'Submitted End Date', along with 'Search' and 'Clear Filters' buttons. A table below this section has columns for 'Address', 'Occupant', 'Inspection Type', 'Urgency', 'Fire Dept. Scheduled Insp. Date', 'Creator', and 'Submitted'.

Inspection Portal Procedures: Inspection Submission Process

Log On

Select under AHJ “Office of the
State Fire Marshal”

Click “Start An Inspection”

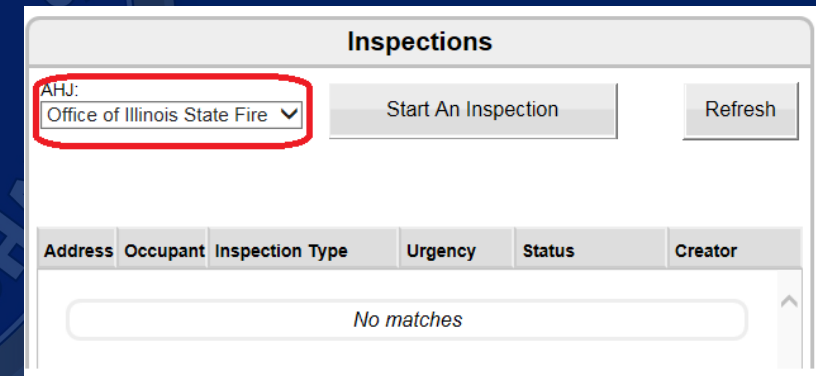

The screenshot shows a web interface titled "Inspections". At the top left, there is a dropdown menu labeled "AHJ:" with the selected option "Office of Illinois State Fire" highlighted by a red rectangle. To the right of the dropdown are two buttons: "Start An Inspection" and "Refresh". Below these elements is a table with the following columns: "Address", "Occupant", "Inspection Type", "Urgency", "Status", and "Creator". The table is currently empty, displaying "No matches" in the center.

Inspection Portal Procedures: Inspection Submission Process

Step 1a (Selecting Address)

Enter the address of the school in the "Street Number" or "Street Name" box or a combination of both. As you type, it will look for matches to existing addresses. If you see your address pop up in the choices, click on it.

The screenshot shows the 'Inspection - Step 1a (Select Address)' interface. At the top, there is a progress bar with six steps: 1. Address (highlighted in green), 2. Occupant, 3. Contact Information, 4. Inspection Type, 5. Check List, and 6. Review/Print/Submit. Below the progress bar, there are two input fields: 'Street Number (OPTIONAL)' with the value '1100' and 'Street Name' with the value 'East INDIANA'. A red box highlights these two fields. To the right of these fields is a 'Street Name Suggestions' section with three buttons: 'East Indian Trail', 'East INDIAN TRAIL Road', and 'East INDIANA'. A red box highlights the 'East INDIANA' button. Below the suggestions are 'Find Matches' and 'Clear' buttons. At the bottom of the form, there is a table with two columns: 'Address' and 'Street'. The table contains one row with the value '1100 East INDIANA Avenue 61764' and a 'Select' button. A red box highlights this row. At the very bottom of the form, there are two buttons: 'I can't find the Job-Site Address' and 'Main Menu'.

Inspection Portal Procedures: Inspection Submission Process

You may also click “Find Matches” and filter through for the address you are looking for.

Inspection - Step 1a (Select Address)

1. Address 2. Occupant 3. Contact Information 4. Inspection Type 5. Check List 6. Review/Print/Submit

Street Number (OPTIONAL) Street Name

Search 1100 East INDIANA

Street Name Suggestions: East Indian Trail East INDIAN TRAIL Road East INDIANA

Find Matches Clear

Address	Street
1100	East INDIANA Avenue 61764 Select

I can't find the Job-Site Address Main Menu

Inspection Portal Procedures: Inspection Submission Process

When you find the address you would like to use, click "Select" to the right of the address field.

Inspection - Step 1a (Select Address)

1. Address 2. Occupant 3. Contact Information 4. Inspection Type 5. Check List 6. Review/Print/Submit

Street Number (OPTIONAL) Street Name

Search 1100 East INDIANA

Street Name Suggestions: East Indian Trail East INDIANA TRAIL Road East INDIANA

Find Matches Clear

Address	Street
1100	East INDIANA Avenue 61764 Select

I can't find the Job-Site Address Main Menu

Inspection Portal Procedures: Inspection Submission Process

Note: The majority of schools have addresses in the database.

If you come across an address with an incorrect ZIP code please make a note of this in the comment sections in Step 6, rather than create a new address.

Inspection - Step 1a (Select Address)

1. Address 2. Occupant 3. Contact Information 4. Inspection Type 5. Check List 6. Review/Print/Submit

Street Number (OPTIONAL) Street Name

Search 1100 East INDIANA

Street Name Suggestions: East Indian Trail East INDIAN TRAIL Road East INDIANA

Find Matches Clear

Address	Street	ZIP	Action
1100	East INDIANA Avenue	61764	Select

I can't find the Job-Site Address Main Menu

Inspection Portal Procedures: Inspection Submission Process

If the address is not there,
click “I can’t find the Job Site
Address” and enter address
accordingly.

For additional instruction
please view the Help Videos on
the main screen.

Inspection - Step 1a (Select Address)

1. Address 2. Occupant 3. Contact Information 4. Inspection Type 5. Check List 6. Review/Print/Submit

Street Number (OPTIONAL) Street Name

Search 1100 East INDIANA

Street Name Suggestions: East Indian Trail East INDIAN TRAIL Road East INDIANA

Find Matches Clear

Address	Street
1100	East INDIANA Avenue 61764 Select

I can't find the Job-Site Address Main Menu

Inspection Portal Procedures: Inspection Submission Process

Step 2a (Select Occupant)

Click "Select" to the right of the occupant you are inspecting (there may be multiple occupants in your structure). You will be asked "Does (occupant) still occupy this space?" Click "Yes"

Inspection - Step 2a (Select Occupant)

1. Address 2. Occupant 3. Contact Information 4. Inspection Type 5. Check List 6. Review/Print/Submit

Occupants at: 1100 East INDIANA Avenue

Structure	Occupant	Suite	Comm/Res	
Un-named structure ID:20117	PONTIAC HIGH SCHOOL		Commercial	Select

Current or Not?

Does...

PONTIAC HIGH SCHOOL

...still occupy this space/suite?

Yes No Cancel

I can't find the Occupant I want to try and find an existing address Main Menu

Inspection Portal Procedures: Inspection Submission Process

Step 3 (Contact Information)

Click "Select" beside your current contact or click "I can't find the Contact" and enter the contact information on the next screen.

The screenshot shows the 'Inspection - Step 3 (Contact Information)' interface. At the top, there is a progress bar with six steps: 1. Address, 2. Occupant, 3. Contact Information (highlighted in green), 4. Inspection type, 5. Check List, and 6. Review/Print/Submit. Below the progress bar, the text 'Choose the main customer contact.' is displayed. Underneath, there is a section titled 'Current Contacts:' with a table containing one entry: 'Mark Jontry' with the role 'ROE Supt.' and a 'Select' button next to it. At the bottom of the interface, there are two buttons: 'I can't find the Contact' and 'Main Menu'. Both the 'Select' button and the 'I can't find the Contact' button are highlighted with red boxes.

Inspection Portal Procedures: Inspection Submission Process

Step 4/5 (Inspection Type)

Click the *calendar* to enter
Inspection date or Click *Today*
if you upload inspection same
day.

Click “” beside Public School.

The screenshot shows the 'Inspection - Step 4 (Inspection Type)' form. At the top, there is a progress bar with five steps: 1. Address, 2. Occupant, 3. Contact Information, 4. Inspection Type (highlighted in green), and 5. Review/Pre-Submit. Below the progress bar, the 'Inspection Date' is set to 6/25/2018, with a calendar icon and 'Today' and 'Clear' buttons. The 'Inspection Types' section has a checked checkbox for 'Public School (Local AHJ)'. The 'Deficiencies?' section has checked checkboxes for 'Critical violations' and 'Non-critical violations', and an unchecked checkbox for 'None'. A link for 'Definitions and Examples of Critical and Non-Critical Violations' is visible. A 'General Comments' text area is present, with a note: 'If the location where the alarm rings has changed, please make a note of it in the comments field.' At the bottom, there is a 'Save & Continue' button and a 'Main Menu' button. A red asterisk and the text '* Field is required' are located above the 'Save & Continue' button.

Inspection Portal Procedures: Inspection Submission Process

DEFICIENCIES

Select appropriate box(s) for Deficiencies

Critical, Non-Critical or None

Click *Critical Violations* or *Non-Critical Violations* based on the criteria defined by the Office of the State Fire Marshal.

NOTE: Please review the definitions for Critical and Non-critical on the link to right of "None"

Inspection - Step 4 (Inspection Type)

1 Address 2 Occupant 3 Contact Information 4 Inspection Type 5 Review/Pre-Submit

• Inspection Date: 6/25/2018 Today Clear

• Inspection Types: Public School (Local AHJ) Critical violations Non-critical violations None [Definitions and Examples of Critical and Non-Critical Violations](#)

General Comments:

* Field is required

Save & Continue Main Menu

Inspection Portal Procedures: Inspection Submission Process

Comments may be added in the
General Comments box.
Click *Save & Continue*

The screenshot shows the 'Inspection - Step 4 (Inspection Type)' form. At the top, there is a progress bar with five steps: 1. Address, 2. Occupant, 3. Contact Information, 4. Inspection Type (highlighted in green), and 5. Review/Pre-Submit. Below the progress bar, the 'Inspection Date' is set to 6/25/2018 with a 'Today' button and a 'Clear' button. The 'Inspection Types' section has a dropdown menu with 'Public School (Local AHJ)' selected. To the right, the 'Deficiencies?' section has three radio buttons: 'Critical violations' (checked), 'Non-critical violations', and 'None'. A link for 'Definitions and Examples of Critical and Non-Critical Violations' is also present. Below this is a 'General Comments' text area with a red asterisk and the text '* Field is required'. At the bottom, there are two buttons: 'Save & Continue' (highlighted with a red circle) and 'Main Menu'.

Inspection Portal Procedures: Inspection Submission Process

Step 6 (Review)

Check the address, occupant and contact information fields are correct.

Saved Inspection - Step 6 (Review)

Address:
Addr/Street: 1100 East INDIANA Avenue
City/State: PONTIAC IL
Zip Code: 61764

Occupant:
Building: PONTIAC HIGH SCHOOL
Suite:
Occupant Type: Commercial

Contact:
First Name: Mark
Last Name: Jonty
Phone: 309-888-5120
Cell Phone:
Email: jontym@roe17.org
Role: ROE Supt.

Inspection Type:
Inspection Type: Public School (Local AHJ)

Deficiencies:
Deficiencies: 0
Public School (Local AHJ)
--none--

General Comments:
Type general comments here

Upload Files:
 Each file must be less than 10 MB File over 10MB? Try [compress.smallpdf.com](#)

File Name	Upload Date	
PONTIAC HIGH SCHOOL.pdf	7/15/2016 11:37:45 AM 1.3 MB	<input type="button" value="Delete"/>

Your inspection is saved. Click Main Menu if you do not want to submit it yet.

Inspection Portal Procedures: Inspection Submission Process

Click "Browse" to upload your inspection.

Each file must be less than 10 MB.

Click "compress.smallpdf.com" to reduce the size of larger documents

Saved Inspection - Step 6 (Review)

Address:
Addr/Street: 1100 East INDIANA Avenue
City/State: PONTIAC IL
Zip Code: 61764

Occupant:
Building: PONTIAC HIGH SCHOOL
Suite:
Occupant Type: Commercial

Contact:
First Name: Mark
Last Name: Jontry
Phone: 309-888-5120
Cell Phone:
Email: jontrym@roe17.org
Role: ROE Supt.

Inspection Type:
Inspection Type: Public School (Local AHJ)

Deficiencies:
Deficiencies: 0
Public School (Local AHJ)
--none--

General Comments:
Type general comments here

Upload Files:
 Each file must be less than 10 MB File over 10MB? Try compress.smallpdf.com

File Name	Upload Date	
PONTIAC HIGH SCHOOL.pdf	7/15/2016 11:37:45 AM	<input type="button" value="Delete"/>
	1.3 MB	

Your inspection is saved. Click Main Menu if you do not want to submit it yet.

Inspection Portal Procedures: Inspection Submission Process

As a reminder only the approved ROE or Fire Service Checklist discussed in this class is permitted to be used for public school inspections. By law, you cannot use your own FD inspection form.


Inspection Portal Procedures: Inspection Submission Process

A confirmation email will be sent to you once your inspection has been accepted and approved.

NOTE: You can also click “Print Preview” if you would like to print a copy of what you are about to submit or click “Email Tool” if you would like to email it to yourself or someone else.

Inspection Portal Procedures: Inspection Submission Process

At this point you are taken back to the Main Menu where you will find a complete listing of the reports submitted or that you are in the process of submitting.

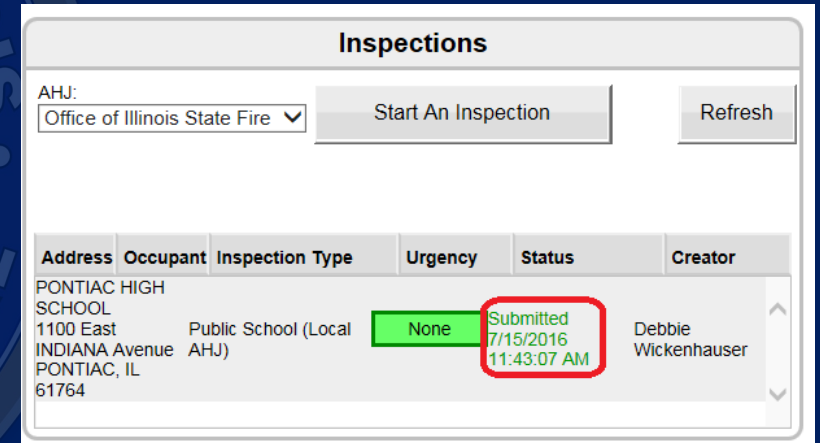

The screenshot shows a web interface titled "Inspections". At the top, there is a dropdown menu for "AHJ:" set to "Office of Illinois State Fire", a "Start An Inspection" button, and a "Refresh" button. Below this is a table with the following columns: Address, Occupant, Inspection Type, Urgency, Status, and Creator. The first row of data is for "PONTIAC HIGH SCHOOL" and its status is "Submitted" with a timestamp of "7/15/2016 11:43:07 AM", which is circled in red.

Address	Occupant	Inspection Type	Urgency	Status	Creator
PONTIAC HIGH SCHOOL 1100 East INDIANA Avenue PONTIAC, IL 61764	Public School (Local AHJ)		None	Submitted 7/15/2016 11:43:07 AM	Debbie Wickenhauser

Inspection Portal Procedures: Inspection Submission Process

Mobile Eyes has some search limitations. For example "1st Street" vs. "First Street" or "W" vs. "West." We have found that the easiest way to find an address is to type in **only** the street number and click on the "Find Matches" button. This will populate a list of addresses in our system that have a variation of the street number you have entered. Then you can select the address you are looking for.

Inspection Portal Procedures

Kensie.Proctor@Illinois.gov

217-785-4714

OR

MobileEyes Help Desk at 866-442-9002

(8:00 a.m.–8:00 p.m. EST)

Email: help@mobile-eyes.com

Mobile Eyes Portal Procedures

Kensie.Proctor@Illinois.gov

217-785-4714

OR


MobileEyes Help Desk at 866-442-9002

(8:00 a.m.–8:00 p.m. EST)

Email: help@mobile-eyes.com

Policy

Enforcement will be as prescribed in ISBE rules and the ROE with jurisdiction will take charge of problems of continued non-compliance.

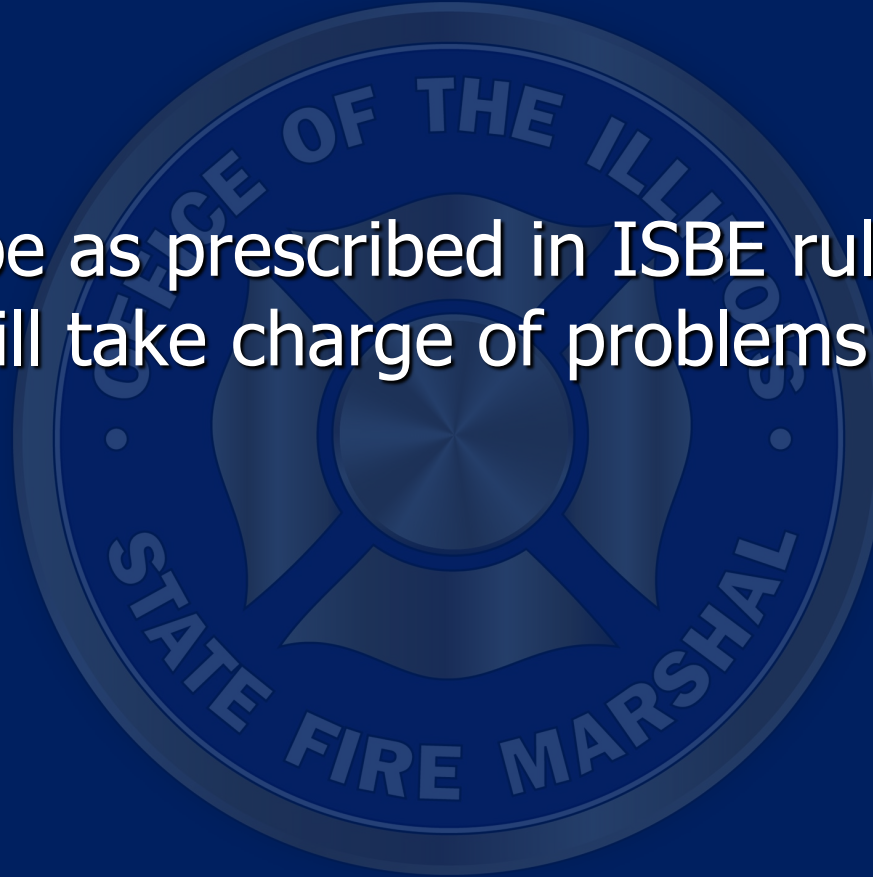

Policy

The ISBE Health/Life Safety Code does not have jurisdiction over Chicago public schools and Chicago Public Schools are not incorporated into this health/life safety collaboration.

23 IL Admin Code Part 180.10(b)

Timeline

July/August prior to school year: Set up inspection appointments for upcoming school year

End of School Year: Inspections should be completed

May 31st: Deadline for submittal of reports, or ROE cannot obtain funding to make repairs as deadline for schools to submit this information to districts is July 30th. Normally June 30th is the deadline, but May 31st helps OSFM pick up the slack during the month of June.

[105 ILCS 5/3-14.21(a)]

Timeline

...BUT THE PART 111 RULES REQUIRE THAT ALL FORMS BE RETURNED 15 CALENDAR DAYS AFTER THE INSPECTION DATE!

Scheduling

In most cases, do not expect to perform inspections during months or days when schools are closed. It is during these times that the schools make repairs, remodel and clean the schools. Schools are predictably “not in compliance” during these times.

But one of the reasons for performing the inspection during occupied hours is so you will see the normal operations when students are in the building and see all the “good” and “bad” habits of the building.

Scheduling

Allow approximately:

- 2 hours for a grade school
- 2-3 hours for a middle school
- 4 hours to 1 day for a high school

Scheduling

To find contact information for your local ROE go to

www.iarss.org

and click on Directory of Regional Superintendents

Definitions

Regional Office of Education or ROE = this is the administrative office for a county or multiple counties. There are multiple school districts in one ROE.

Each school district has a superintendent

ROE Superintendent + District Superintendent

Definitions

Authority Having Jurisdiction or AHJ = The AHJ is the ROE or ISBE. It is not the local fire department or OSFM.

Per administrative rule the OSFM and local fire departments are allowed to inspect public schools but are not the AHJ.

Definitions

Additionally, the ROE's handle all construction and remodeling from that office for all their school districts.

New construction is not part of this class and is covered under a separate set of ISBE rules.

Definitions

Health/Life Safety Code = “The Health/Life Safety Code is a document prepared by ISBE with the advice of IDPH, the Capital Development Board and OSFM to ‘conserve the health and safety and general welfare of the pupils,’ school personnel and others who use public school facilities.”

23 Ill. Admin. Code 180

Definitions

Health/Life Safety Code = The ISBE “Health/Life Safety Code” which should not be confused with the NFPA 101, *Life Safety Code* that has been adopted by the OSFM for application in other occupancies.

Definitions

ROE Health/Life Safety Checklist

Fire Service Checklist

Remember you are only permitted to use these approved forms. You cannot use your own fire department inspection form and forms must be returned to OSFM and ROE within **15** calendar days.

Definitions

Health/Life Safety Glossary. This is a guidance document that identifies and describes the various items that should be checked during the inspections as well as the applicable code sections.

This document provides explanations for requirements and helps the inspector apply the checklist. The glossary works for both checklists.

Definitions

Health/Life Safety Handbook. This handbook includes copies of the Health/Life Safety Glossary and checklists but also contains much information that is used by the ROE that the fire service inspector does not need to worry about. These should be kept at each ROE and can be accessed from the ISBE website. (See next slide)

Definitions

www.isbe.net

In search box type in Life Safety

Adopted Codes

See matrix in front of the Glossary

Part 185 – for schools approved for design before July 1, 1965

Part 175 – for schools approved for design after July 1, 1965 but before March 24, 1995.

Adopted Codes

Part 180 (BOCA 1993) – for schools approved for design on or after March 24, 1995 but before July 6, 1998

BOCA 1993 Fire Prevention and Property Maintenance Codes can be retroactive to all the older schools unless Parts 175 or 185 have something more stringent

Adopted Codes

Part 180 (BOCA 1996) – for schools approved for design on or after July 6, 1998 but before October 3, 2005

Part 180 (ICC 2003) – for schools approved for design on or after October 3, 2005 but before September 25, 2007

Adopted Codes

Part 180 (ICC 2006) – for schools approved for design on or after September 25, 2007 but before January 1, 2010

Part 180 (ICC 2009) – for schools approved for design on or after January 1, 2010 but before July 1, 2016

Part 180 (ICC 2015) – for schools approved for design on or after July 1, 2016


Adopted Codes

If an issue arises, the ROE will make the final interpretation.
Remember our inspection is only advisory.

But again, if you feel strongly that their interpretation is incorrect, you should call OSFM

Adopted Codes

Most “large ticket” items are caught (or should be) by the district architect during the 10-year survey process.

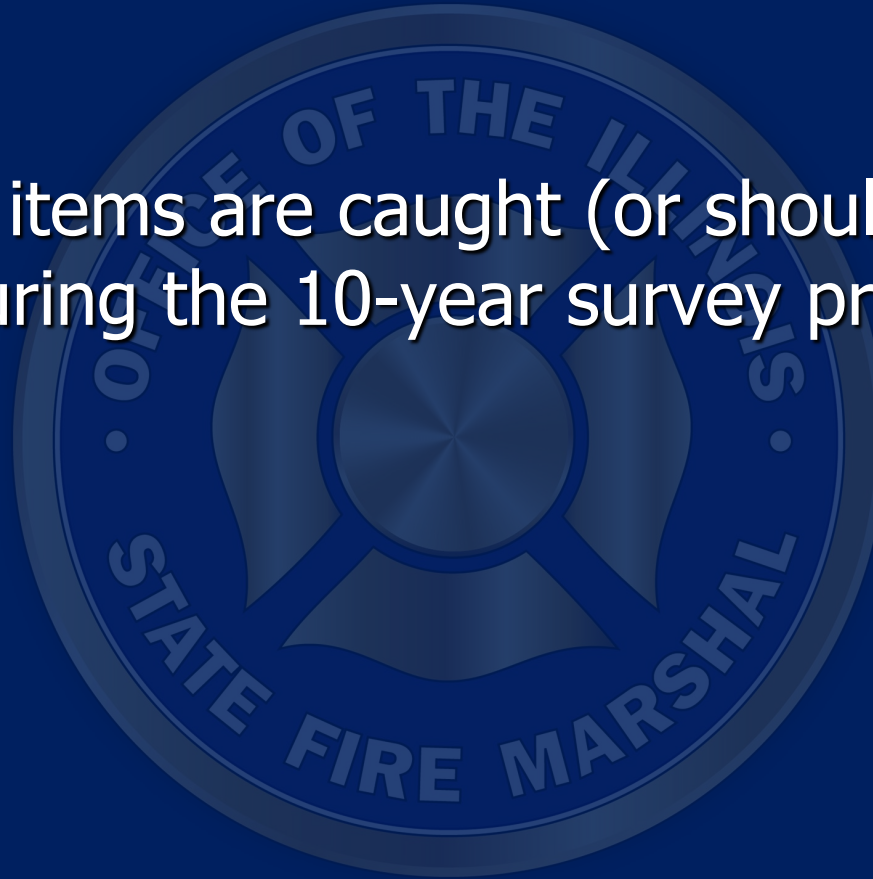

Adopted Codes

No matter what code the inspector uses, their experience in performing inspections and their general knowledge of codes will assist them in this school inspection process.

The inspector should be able to recognize a violation and the Glossary will point to the code section that is in violation

Adopted Codes

Only the codes adopted by ISBE are the codes that can be referenced. These rules apply to all buildings owned or leased by the public school district, whether student occupied or not.

Codes adopted by the local fire agency or OSFM are not applicable within public schools in Illinois (except for CPS, which must comply with Chicago codes).

Adopted Codes

105 ILCS 5/10-22.10

Sec. 10-22.10. Control and supervision of school houses and school grounds.

To have the control and supervision of all public schoolhouses in their district, and to grant the temporary use of them, when not occupied by schools, for religious meetings and Sunday schools, for evening schools and literary societies, and for such other meetings as the board deems proper; to grant the use of assembly halls and class rooms when not otherwise needed, including light, heat and attendants, for public lectures, concerts, and other educational and social interests, under such provisions and control as they may see fit to impose; to grant the use of school grounds under such provisions and control as they may see fit to impose and to conduct, or provide for the conducting of recreational, social and civic activities in the school buildings or on the school grounds or both.

(Source: Laws 1967, p. 264.)

Adopted Codes

Carnival rides are required to be inspected by the Illinois Department of Labor



Adopted Codes

Local fire departments and OSFM will NOT be expected to inspect or enforce:

- The Illinois Accessibility Code
- The Illinois Plumbing Code
- The requirements used by Illinois Department of Labor
- Bleachers (except for areas under bleachers)

Adopted Codes

The ROE Checklist and Glossary are broken down into “use” areas expected to be found in a public school. An elementary school is likely to not have all the areas found on the checklist, such as a woodworking shop or swimming pool.

Hazards or conditions common to each area are identified and some features are repeated as the inspector moves from room to room.

Checklist and Glossary Format

The Fire Service checklist is arranged according to inspection item category, which is a more familiar format for local fire inspectors. The numbering for the Fire Service checklist is consistent with the number in the Glossary.

Checklist and Glossary Format

The numbering for the ROE checklist and the Fire Service checklist is consistent with the numbering in the Glossary.

OSFM provides a fillable form on our website that can be used but please understand that newer browsers sometimes do not allow fillable forms to be opened online. If you run into this problem try opening it up in an older browser or you can “save as” the form and download to your desktop. It should open normally. But OSFM cannot promise it will work.


Checklist and Glossary Format

Remember: You must use the approved ROE or Fire Service checklists discussed in this class. You cannot use your FD's inspection forms to perform the inspections of public schools.

Remember: You must turn in the reports to OSFM and the ROE within 15 calendar days.

Checklist and Glossary Format

During this training it is assumed that you will have a basic knowledge of fire and life safety terms, but if you need an explanation please do not hesitate to ask.

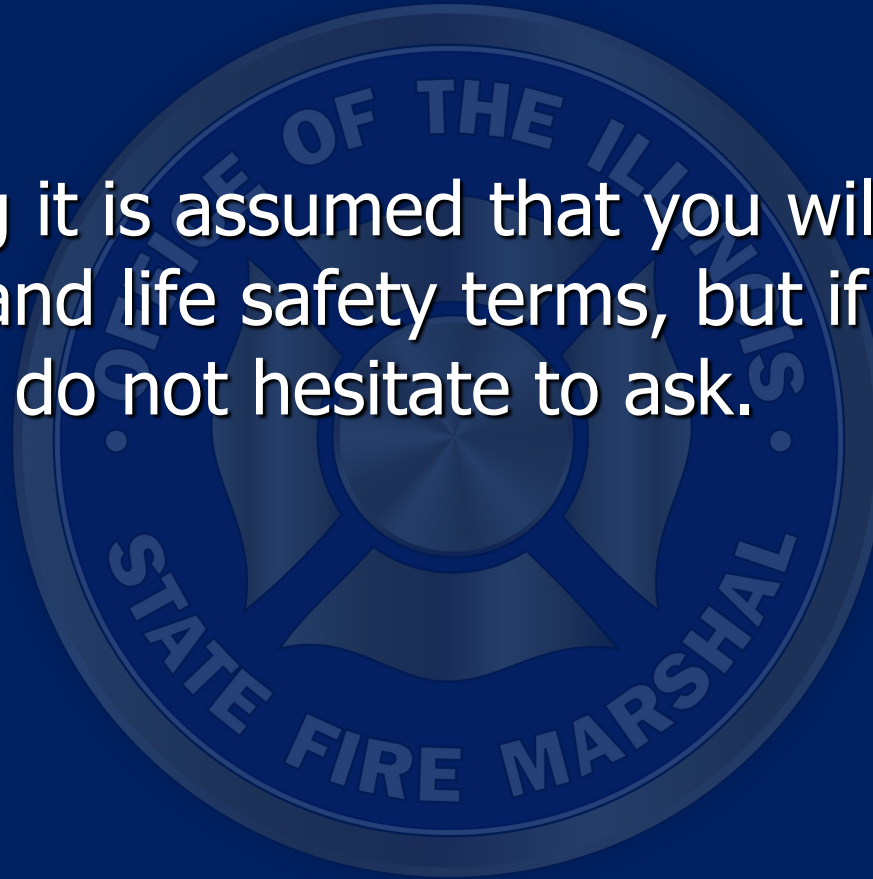

Administration and General Building Requirements

#1. Safety Reference Plans – Should be available at each school. The Health/Life Safety Handbook provides all the information needed for these plans. The Safety Reference Plan identifies:

- Site plan
- Schematic floor plans
- Utilities
- Fire protection systems

Administration and General Building Requirements

#2. School Safety Drills -

During each academic year:

- 3 building evacuation drills (1 with fire official present)
- 1 bus evacuation drill
- 1 shelter-in-place (tornado drill)
- 1 law enforcement drill to address lock-downs, shootings, bomb threats

Administration and General Building Requirements

#2. School Safety Drills -

Inspector should ask for documentation, taking into consideration the time of year his/her inspection is taking place.



Administration and General Building Requirements

#2. School Safety Drills -

The local inspector should keep their own records, but it is ultimately the responsibility of the school district (and not the local) to submit their drill records to the ROE or ISC.



Administration and General Building Requirements

#3. Annual Review of Crisis Plan -

Local fire departments, police departments, EMS providers, etc. are all involved in this plan. Requires signature of all participating agencies that plan is approved for that school year. This covers both public and private schools.

Administration and General Building Requirements

#4. Hold-Open Devices –

For doors that are required to be fire-rated or prevent the spread of smoke, approved door closing devices must be installed. In most cases, it must be an approved hold-open device interfaced with a smoke detector and only in the Part 175/185 schools, interfaced with the fire alarm system. But always check actual requirements.

Administration and General Building Requirements

#5. Unobstructed Exits -

- Nothing blocking doors, aisles, corridors
- Required clear width maintained
- Not hidden by curtains, temporary partitions



Administration and General Building Requirements



1/22/2024



December 2023



100

Administration and General Building Requirements

#6. Emergency Lighting and Exit Signs -

Emergency lighting and exit signs are generally required in rooms or areas where 2 means of egress are required.



Administration and General Building Requirements

#6. Emergency Lighting and Exit Signs -



Administration and General Building Requirements


#7. Periodic Testing of Emergency Lighting Equipment –

Appendix F in the Glossary provides guidance for this process and can be copied and given to the school official.

Administration and General Building Requirements

#8. Proper Storage and Use of Flammable and Combustible Liquids and Other Chemicals –


Storage of these items are varied and found throughout a school building. Appendix B provides guidance for the school official as well as the inspector.

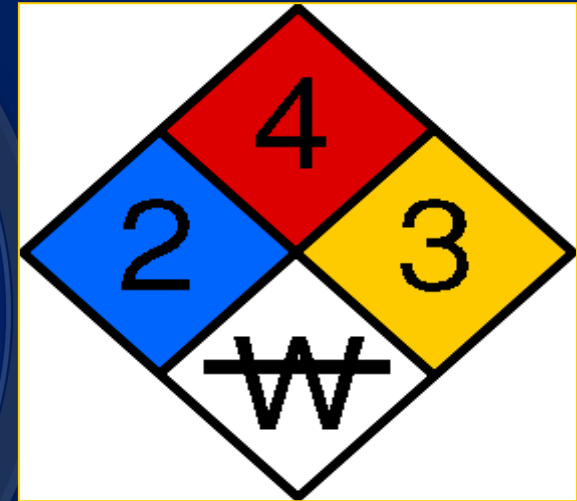

Administration and General Building Requirements

#9. Functional Fire Alarm System -

Depending upon the size of the school building, the majority of all buildings are required to have a fire alarm system.

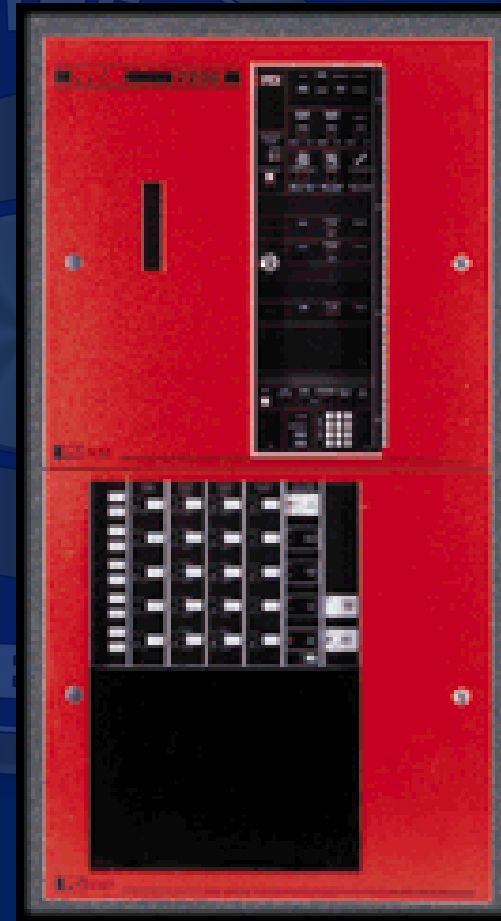

Administration and General Building Requirements

#10. Fire Alarm Audibility –

The fire alarm has to be heard throughout the building. The inspector does not need to perform this test or carry a sound meter, but it is possible that occupants in noisy mechanical rooms, music practice rooms, or similar areas will not be able to hear the alarm should it activate.

Administration and General Building Requirements

#11. Manual Fire Alarm Station -

Make sure pull stations are clear, unobstructed, and not damaged.

Administration and General Building Requirements

#12. Fire Alarm Inspection, Testing, and Maintenance (ITM) –

Ask for the fire alarm ITM report

See Appendix C for requirements specific to age of building


Administration and General Building Requirements



Administration and General Building Requirements

#13. Functional Sprinkler System –

Inspectors will not be requiring the installation of sprinkler systems but will perform a general visual inspection of existing systems and asking for required maintenance and testing.

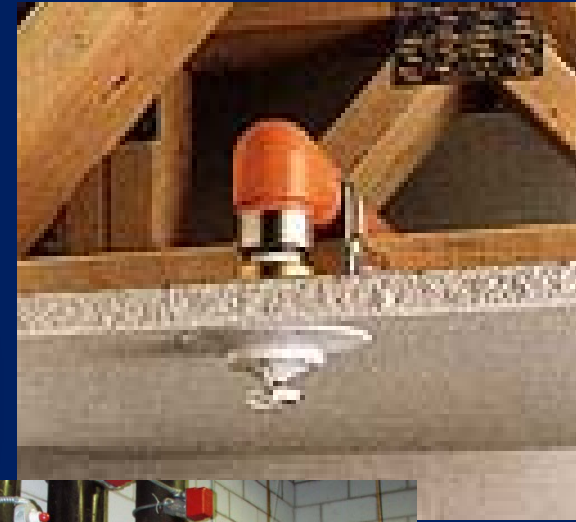

Administration and General Building Requirements

#13. Functional Sprinkler System -

Sprinkler systems must be inspected and/or tested by a contractor that is licensed by OSFM. This includes fire pump tests.

Administration and General Building Requirements

#14. Clearance Above Storage and In Unsprinklered Rooms or Areas -


Not normally a horizontal plane below sprinkler deflector as always believed. NFPA 13 provides diagrams that clarify this requirement.



Administration and General Building Requirements

#14. Clearance from Storage and In Unsprinklered Rooms or Areas-

Sprinklers shall be located so as to minimize obstructions to discharge as defined in 8.5.5.2 and 8.5.5.3, or additional sprinklers shall be provided to ensure adequate coverage of the hazard. (See Figure A.8.5.5.1.)

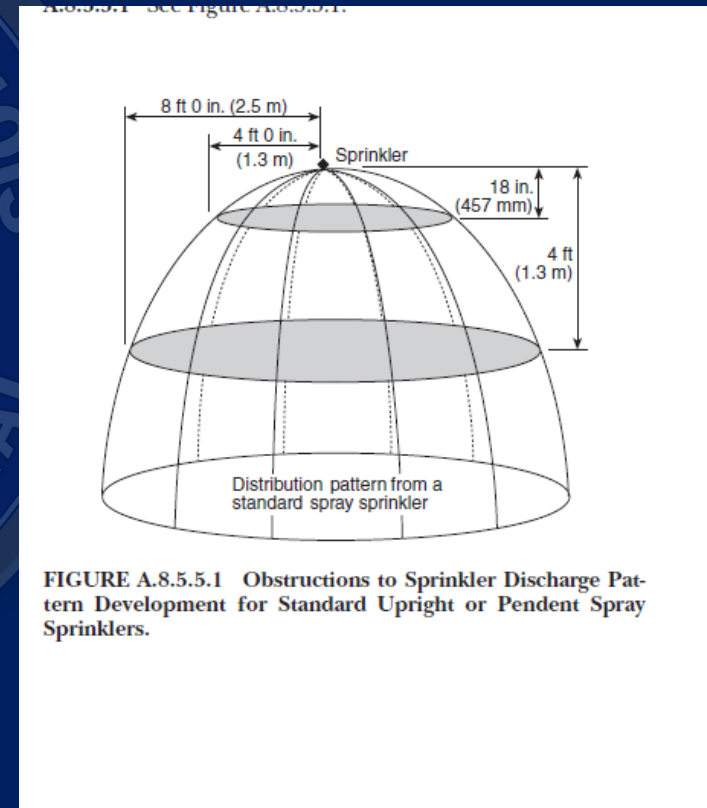

Administration and General Building Requirements

#14. Clearance Above Storage and In Unsprinklered Rooms or Areas-

In areas without sprinklers, the codes adopted by ISBE still require that storage be maintained at least 2 ft. below ceilings.

Administration and General Building Requirements



Administration and General Building Requirements

#15. Functional Standpipe System –

The inspector will not be requiring these to be installed but should asking for required maintenance and inspection report.

If the standpipe is used as part of the supply for a sprinkler system, then it must be inspected by a contractor licensed by OSFM.

Administration and General Building Requirements

#15. Functional Standpipe System -

Hoses should be appropriately tagged.

Administration and General Building Requirements

#16. Fire Extinguishers

Fire extinguishers are required to be installed in accordance with NFPA 10 (2007) pursuant to Title 41 Il Adm Code 251.

Also see Appendix D.

Administration and General Building Requirements



1/22/2024



December 2023



119

Administration and General Building Requirements

#16. Fire Extinguishers —

OSFM rules require that fire extinguishers be serviced and inspected by a State licensed contractor and the current inspection tag be attached to the fire extinguisher.



41 IL Admin Code Part 251

Administration and General Building Requirements

#17. Safety Glazing –

This is part of the inspection fire service inspectors are not responsible for. But relates to the Safety Glazing Materials Act that became effective on January 1, 1973.

Administration and General Building Requirements

#18. Emergency Shower and Eye Wash Stations –

This item falls under the jurisdiction of the Illinois Department of Labor and the fire department, fire protection district or OSFM inspector will not be required to review or enforce this.



Administration and General Building Requirements

#19. Wall-Mounted Alcohol Hand-Rub Dispensers -

New and existing wall-mounted installations must comply with this requirement. See Appendix H.

Bulk storage of this product falls under applicable requirements from flammable combustible liquid storage requirements.

Administration and General Building Requirements

#20. Decorative Vegetation –

The IFC prohibits natural cut trees in areas that are not protected with sprinklers. If sprinklers are installed, then certain minimum requirements apply for the display of natural cut trees.

See Appendix I



Administration and General Building Requirements

#21. Space Heaters -

Unvented, fuel-fired heating appliances are prohibited.
Other permissible heating appliances must be listed.

Administration and General Building Requirements

#22. Curtains, Draperies, and Decorations –

The Glossary goes into great detail on these requirements and a definition of “decorative material” has been provided.

Administration and General Building Requirements

#22. Curtains, Draperies, and Decorations -


In general, there are no requirements prohibiting the use of personal furniture in classrooms.

In general, curtains, drapes and other decorations must comply with NFPA 701.

Administration and General Building Requirements


#22. Curtains, Draperies, and Decorations -

But always double check actual code requirements!

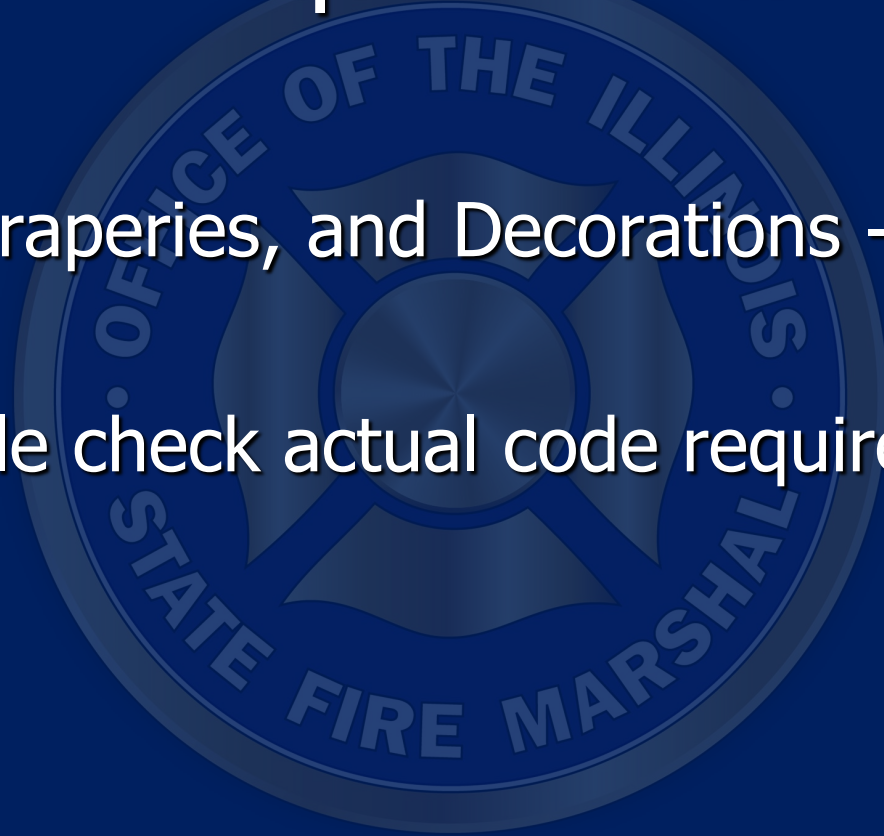

Administration and General Building Requirements


#23. See Appendix L for newly installed interior finish requirements

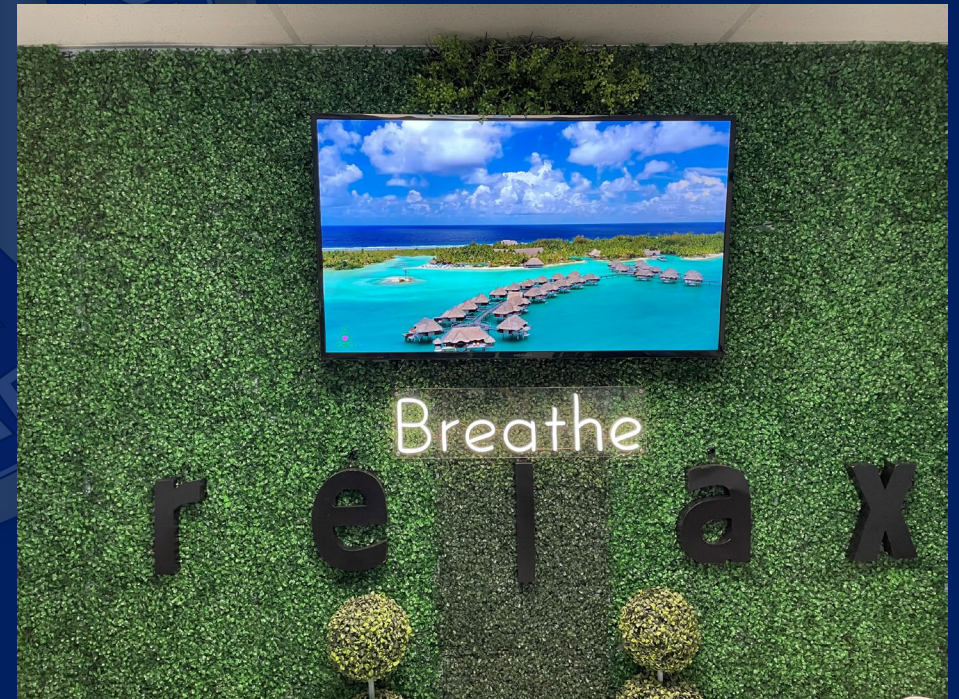

Administration and General Building Requirements

#24. Multiple Plug Adaptors –

Multiple plug adaptors not complying with NFPA 70 not permitted.

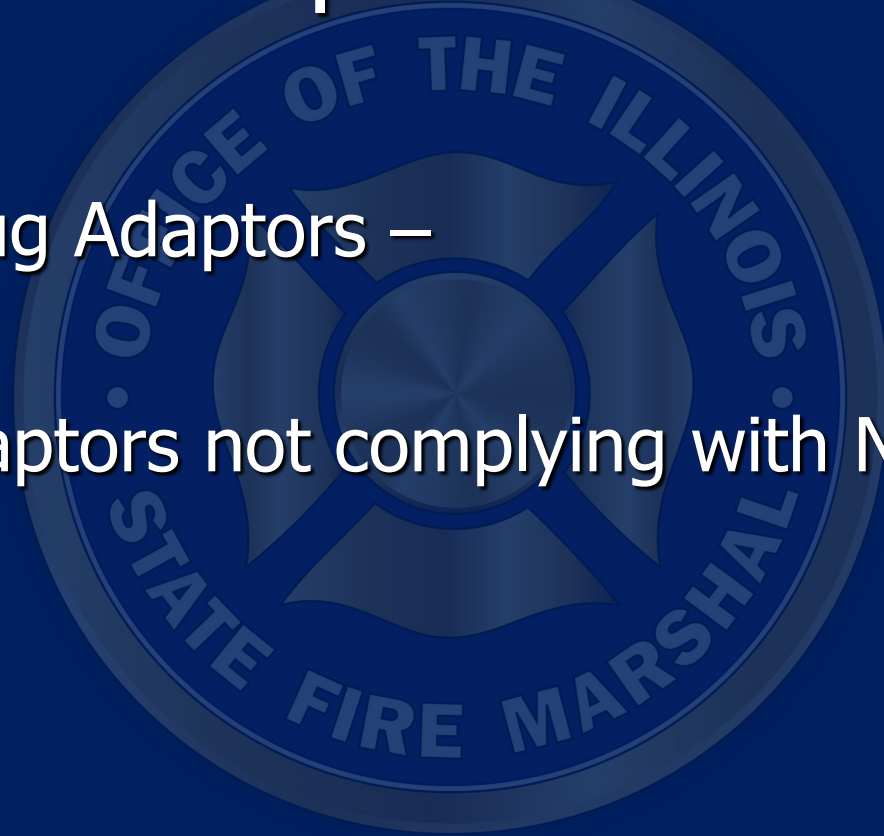

Administration and General Building Requirements

#24. Extension Cords –

Extension cords and flexible cords cannot be a substitute for permanent wiring. Extension cords cannot extend through walls, under rugs or affix to walls, ceilings or under doors and the must be protected from environmental or physical damage.

Administration and General Building Requirements

#25. Electrical Systems –

All identified electrical hazards shall be abated.



Administration and General Building Requirements

#26. Carbon Monoxide Detection-

All schools must have carbon monoxide detection located within 20 feet of a carbon monoxide emitting device. Schools designed before January 1, 2016, may use carbon monoxide alarms powered by batteries.

(105 ILCS 5/10-20.57, 41 Ill. Adm. Code 112.230)

Administration and General Building Requirements

#26. Carbon Monoxide Detection-

For public schools designed on or after January 1, 2016, any carbon monoxide alarm installed must be monitored by any required fire alarm system and must be permanently powered by the building's electrical system.

(105 ILCS 5/10-20.57, 41 Ill. Adm. Code 112.230)

Administration and General Building Requirements

#26. Carbon Monoxide Detection-

A school is exempt from these requirements if it does not have or is not close to any sources of carbon monoxide.

Alarms or detectors must be in operating condition and be inspected annually.

Administration and General Building Requirements

#26. Carbon Monoxide Detection-

A school must require plans, protocols, and procedures in response to the activation of a carbon monoxide alarm or carbon monoxide detection system.

Security Locking

Additional locking on classroom doors is permitted as long as the locking device complies with all the following requirements:

1. The door security locking means can be engaged without opening the door.
2. The unlocking and unlatching of the door security locking means from the occupied side of the door can be accomplished without the use of a key or tool.
3. The door security locking means complies with all applicable State and federal accessibility requirements.
4. Locks, if remotely engaged, can be unlocked from the occupied side.

105 ILCS 5/10-20.72

Sec. 10-20.72. Door security locking means

Security Locking

Additional locking on classroom doors is permitted as long as the locking device complies with all the following requirements (continued):

5. The door security locking means is capable of being disengaged from the outside by school district employees, and school district employees may use a key or other credentials to unlock the door from the outside.
6. The door security locking means does not modify the door-closing hardware, panic hardware, or fire exit hardware.
7. Any bolts, stops, brackets, or pins employed by the door security locking means do not affect the fire rating of a fire door assembly.
8. School district employees are trained in the engagement and release of the door security locking means, from within and outside the room, as part of the emergency response plan.

Security Locking

9. For doors installed before July 1, 2019 only, the unlocking and unlatching of a door security locking means requires no more than 2 releasing operations. For doors installed on or after July 1, 2019, the unlocking and unlatching of a door security locking means requires no more than one releasing operation. If doors installed before July 1, 2019, are replaced on or after July 1, 2019, the unlocking and unlatching of a door security locking means on the replacement door requires no more than one releasing operation.
10. The door security locking means is no more than 48 inches above the finished floor.
11. The door security locking means otherwise complies with the school building code prepared by the State Board of Education under Section 2-3.12.

Exception-Security Locking

3. The door security locking means complies with all applicable State and Federal accessibility requirements.
10. The door security locking means is no more than 48 inches above the finished floor.

Under these provisions, a school can fit an ADA compliant deadbolt and use two motions to first unlock and then unlatch an existing door. Any locking mechanisms installed in new construction or when replacing doors must comply with the single motion unlocking and unlatching.

Schools are permitted the option to use a device that does not comply with requirements found in #3 and #10 (above) upon written agreement of the **local fire department, local law enforcement, and local school district**. The remainder of the requirements must be complied with. This device placement is limited to doors in place prior to July 1, 2019.

Exception-Security Locking

3. The door security locking means complies with all applicable State and Federal accessibility requirements.
10. The door security locking means is no more than 48 inches above the finished floor.

But as a reminder the locking device must comply the remaining items in the list.

One of the items usually forgotten is the requirement that the device not void any of the door's listings or fire-ratings or manufacturer's specifications, especially if the device is being attached directly to the door.

Exception-Security Locking

This is not a process that is easy to determine. OSFM or the local fire department may not (and probably should not) be able to make this determination. Frequently the door's manufacturer or third-party listing must be called.

The codes adopted by ISBE must be followed, which includes NFPA 80, *Standard for Fire Doors and Other Opening Protectives*.

So this is something that probably cannot be determined immediately or with the presentation of the marketing flyer.

Classrooms

See Appendix N for more information.



FLIPS • DROPS • **LOCKS** • SAVES LIVES

KEY



ACTIVATED
DEVICE

To remain code-compliant, Flip Lok has a key and law enforcement to be able to unlock



Special Note For Fire Rated Construction

These inspections are not destructive inspections. You should not be damaging walls to determine actual wall design

The purpose of the inspection is to confirm that the integrity of the fire rated wall is being maintained

Special Note For Fire Rated Construction

What is shown on the slides related to fire-rated separation is mainly to identify when Parts 175 and 185 have differing requirements from the model codes (BOCA and ICC). The inspector should always double check with the actual code requirements if there is a question. Using Appendix O, P, or Q in the back of the Glossary will also help.

Special Note For Fire Rated Construction

Check for :

- Unprotected penetrations
- Proper doors
- Proper glazing
- Approved self-closing devices (if required)
- Approved positive latching (if required)
- Fire/smoke dampers


Special Note For Fire Rated Construction

ISBE has agreed with the OSFM's interpretation of their codes that self-closing devices and latching is required on any door required to be a fire-rated door.

ISBE has agreed with the OSFM's interpretation of their codes that unprotected louvers, transoms etc. are not permitted

Special Note For Fire Rated Construction

The biggest issue created by this will be classroom corridor doors, especially in older (Part 175/185) buildings.

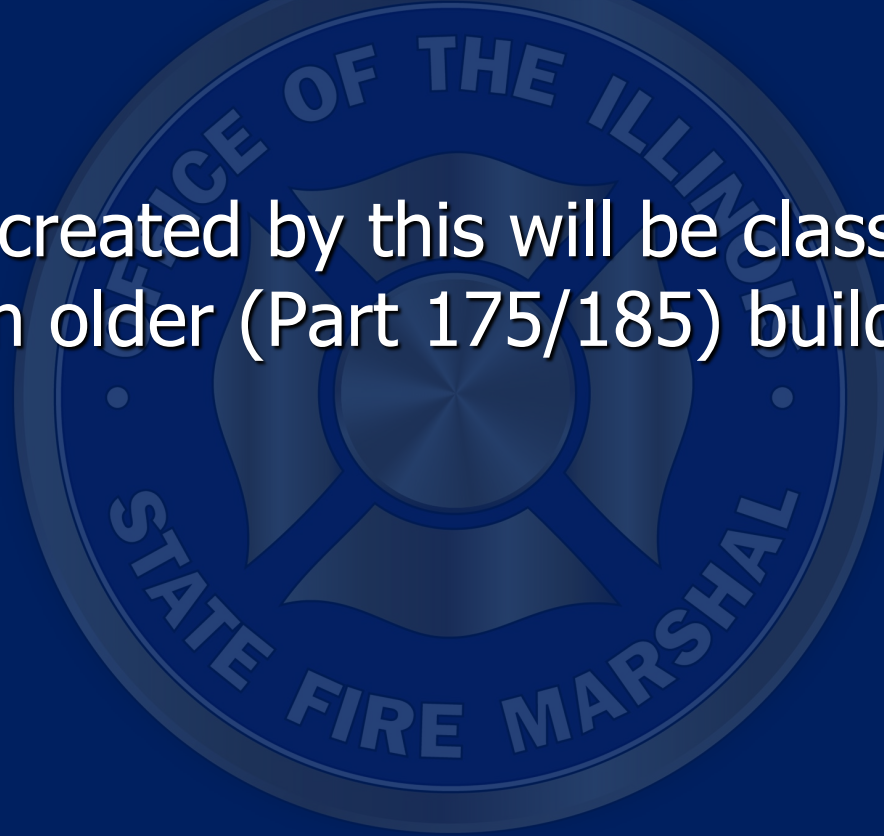

Special Note For Fire Rated Construction

ISBE has determined based on the literal interpretation of IFC 703.1.2 (and the OSFM agrees) that annual fire safety inspections do not include mandatory documentation of inspection and testing of dampers and fire doors.

Special Note For Fire Rated Construction

Appendix O = Separation requirements 175

Appendix P = Separation requirements 185

Appendix Q = Separation requirements 180
(BOCA 1993/1996 + ICC 2003/2006/2009/2015)

Facilities and Buildings


If a building is owned or leased by a public school district and used for public school purposes, that building or portion owned or leased by the public school district must comply with the ISBE Health/Life Safety Code.

Facilities and Buildings

But if the building is owned by a public school district and leased out for other than public school purposes, the building or portion thereof must comply with at minimum the code adopted by the local authority and if that authority is not a home rule municipality, then it must also comply with the codes adopted by OSFM, whichever is more stringent.

Agricultural Labs

See individual sections for those special processes that might exist in an agricultural lab, i.e., green houses, automotive shops, industrial shops, or science labs.

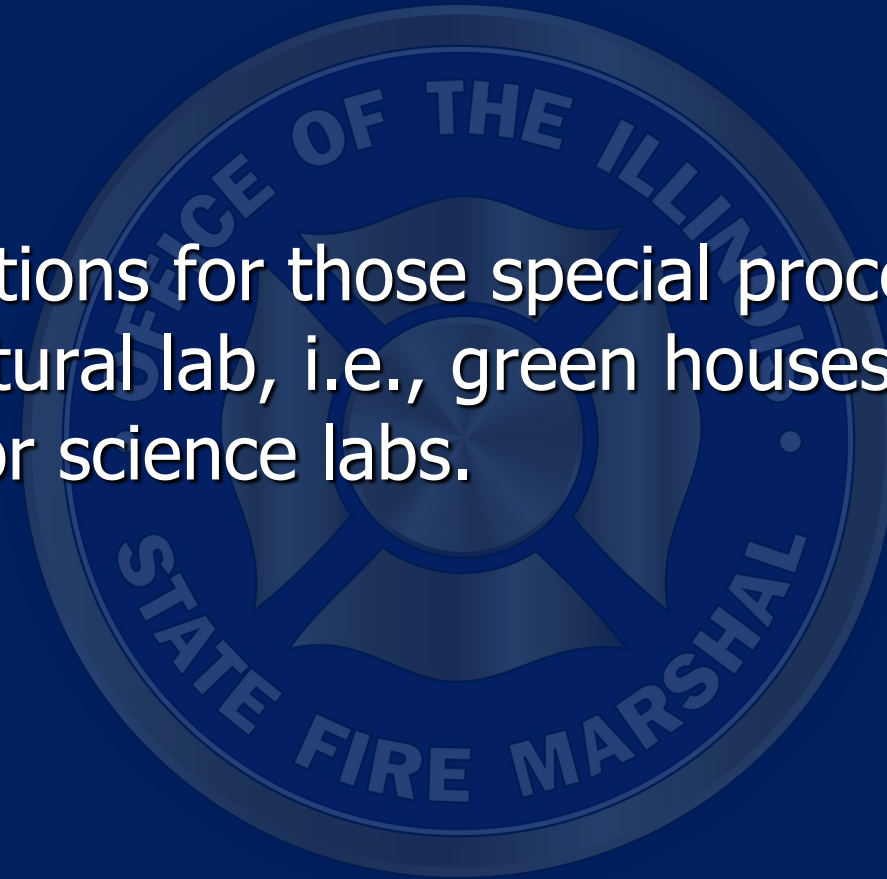

Arts and Crafts Rooms

These requirements apply to the larger rooms generally found in high schools or possibly middle schools that have large quantities of art supply storage, kilns, painting using flammable or combustible paints, thinners, etc.

Arts and Crafts Rooms

#28. Maintenance of Fire-Rated Construction and Door Closers –

ISBE rules (175/185) require these rooms to be enclosed by ¾-hour fire rated construction:

- Doors, closers, positive latching
- Walls (wall rating is a 10-year survey item)
- Wall penetrations (firestopping maintained?)
- Glazing

Arts and Crafts Rooms

#29. Fire Detectors –

Requirement unique to 175/185. Only required if room is not protected with sprinklers. Can be heat or smoke detectors.

Arts and Crafts Rooms

#30. Spray Finishing Operations using Flammable Finishes -

- Area or room must be protected with sprinklers
- Sprinklers in spray area/exhaust
- Cover sprinkler heads with thin plastic bags
- Mechanical exhaust directly to outside
- No welding or other spark producing operations



Arts and Crafts Rooms

Note on bags covering sprinklers heads

Only cellophane bags having a thickness of $\leq 0.003''$ or a thin paper bag are permitted to be used. Polypropylene bags such as "Glad", "Baggies", or "Ziploc" bags are not permitted because they shrink prior to development of temperatures needed to ensure sprinkler activation and can interfere with proper operation. True cellophane bags and thin paper bags degrade rather than melt.

[NFPA 13-Section 6.2.6.4.2 (2013)]

Arts and Crafts Rooms

#31. Limited Spraying Spaces –

Where aggregate surface area to be sprayed does not exceed 9 ft²:

- Sprinkler protection not required
- Mechanical ventilation still required

Arts and Crafts Rooms

#32. Explosion Proof Fixtures –


Check the requirements found in the applicable edition of NFPA 70, *National Electrical Code*.



Arts and Crafts Rooms

#33. Kiln Exhaust –

If a kiln exists it must have its own exhaust system that exhausts directly to outside.

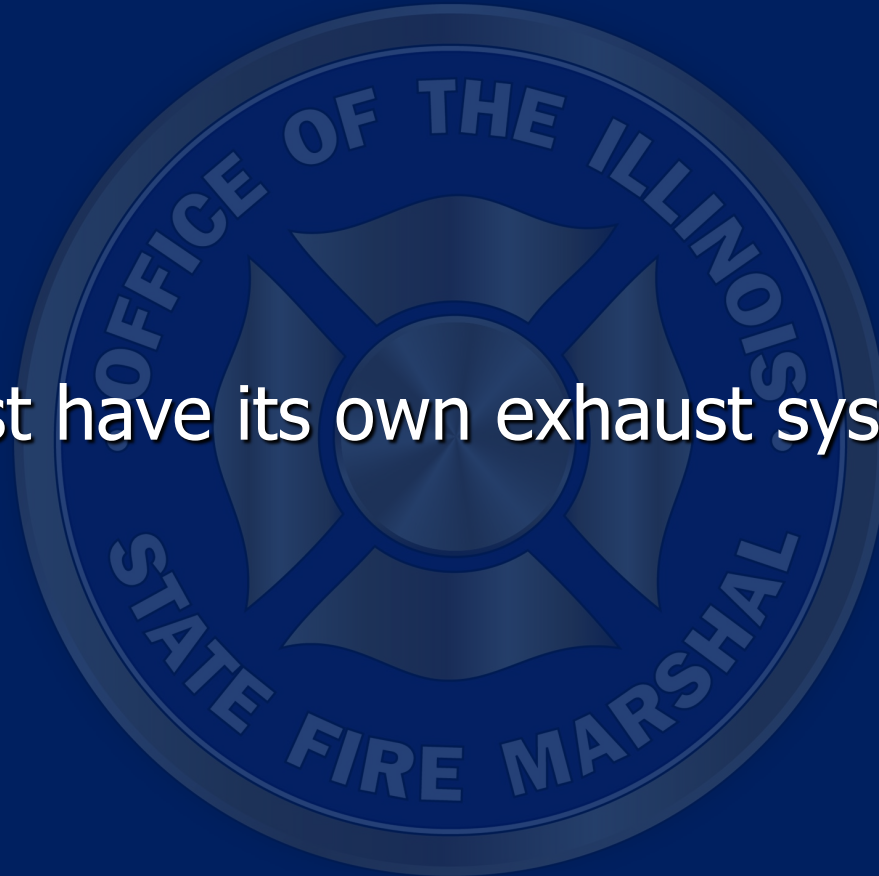

Arts and Crafts Rooms

#34. Kiln Fuel Switch –

Part 175/185 requires an emergency disconnect switch for fuel-fired (not electric) kilns and it is required at the primary entrance to the room, between 6-7 ft. above the floor. Must be painted red and labeled “Emergency Fuel Burner Switch”

Arts and Crafts Rooms

#35. Safety Glasses —

This item falls under the jurisdiction of the Illinois Department of Labor and the fire department, fire protection district, or OSFM inspector will not be required to review or enforce this.



Arts and Crafts Rooms

#36. Toxic Art Supplies –

This item falls under the jurisdiction of ISBE and the Illinois Department of Labor and the fire department, fire protection district, or OSFM inspector will not be required to review or enforce this.



Auditoriums

#37. Posted Occupancy Load –

Any assembly occupancy (occupancy load > 50 persons) must have an occupancy load sign posted in a visible location. The Health/Life Safety Handbook has a sample sign, or you can use your own FD published sign if available.

Auditoriums

#38. Number of Exits –

The means of egress capacity for the auditorium will more than likely be calculated at the time the auditorium was designed. So, it is assumed the number of existing exits is approved. This number cannot be reduced for any reason.

Auditoriums

#38. Number of Exits -

If the inspector feels the existing number is not in compliance with the applicable ISBE adopted code or ISBE rule, then he/she should bring this issue to the school official or the ROE.



Auditoriums

#39. Means of Egress Arrangement –

Required clear width of aisle, aisle accessways should be maintained.



Auditoriums

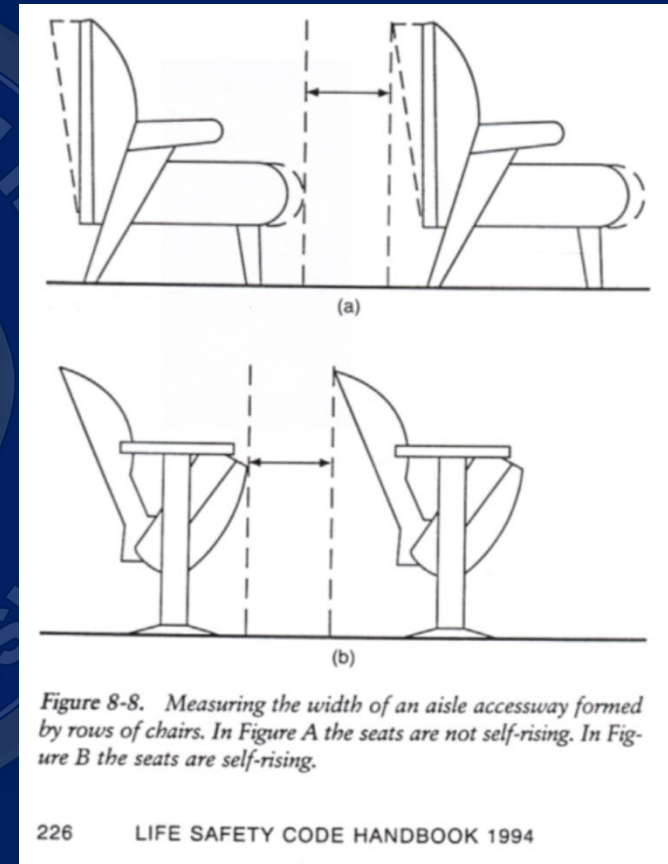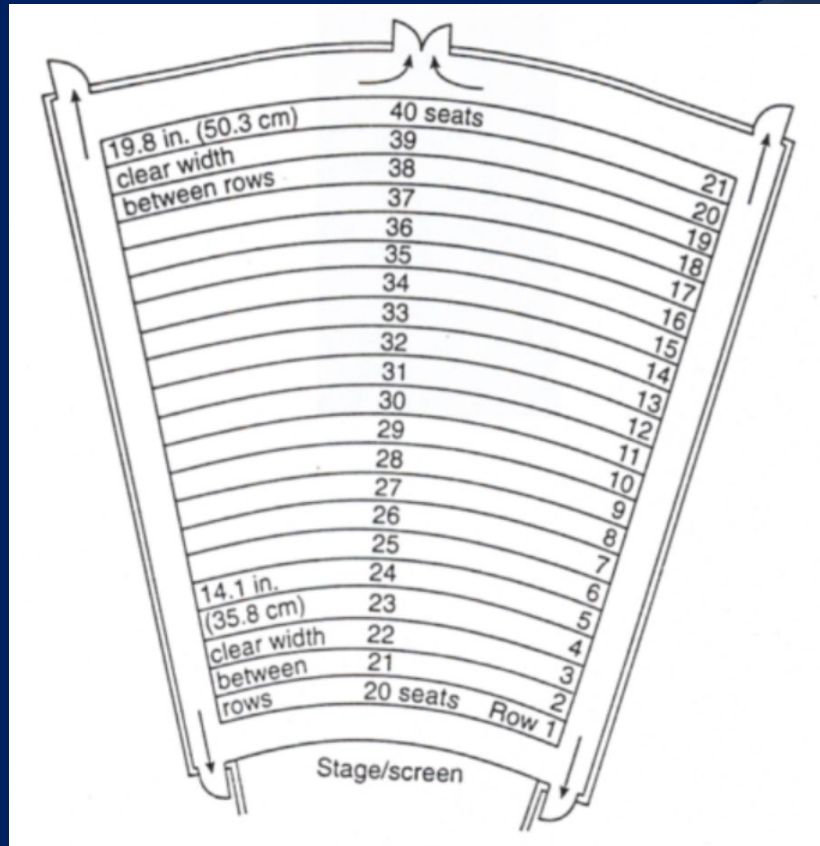

Auditoriums

#40. Illuminated Exit Signs –

Must be either internally illuminated or externally illuminated and installed at every required exit doorway.



Auditoriums

#41. Emergency Lighting –

Is required to illuminate the means of egress in auditoriums.




Auditoriums

#42. Maintenance of Fire-Rated Construction and Door Closers –

Part 175/185 requires assembly areas load > 600 persons is required to be enclosed with 1-hour fire-rated construction

Auditoriums

Part 175/185 only: Smoke or heat detectors are only required in assembly areas if the room or area has interior finish with flame spread > 75 and is not protected with sprinklers.

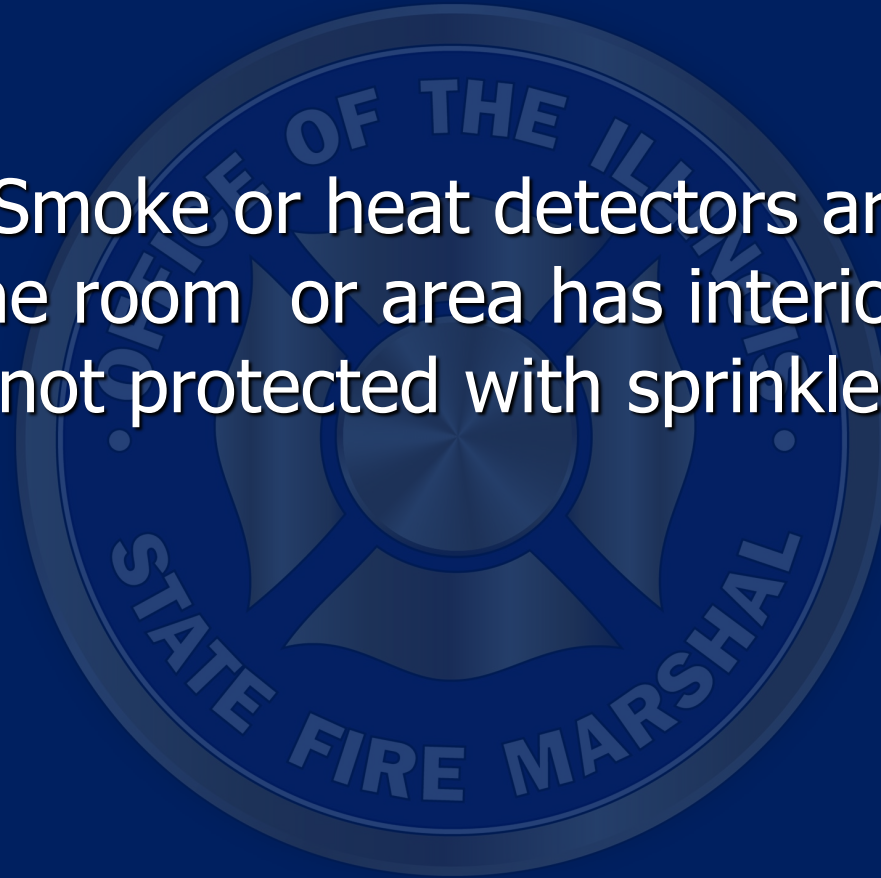

Automotive Shops

#51. Maintenance of Fire-Rated Construction and Door Closers –

175/185 requires automotive shops to be enclosed with 1-hour fire-rated construction.

Automotive Shops

#52. Fire Detectors – 175/185 only and only if area is not sprinklered

#53. Spray Finishing Operations Using Flammable Finishes.

#54. Limited Spraying Spaces –

#55. Explosion Proof Fixtures – Follow NFPA 70

Automotive Shops



Automotive Shops



Automotive Shops

Note on bags covering sprinklers heads

Only cellophane bags having a thickness of ≤ 0.003 " or a thin paper bag are permitted to be used. Polypropylene bags such as "Glad", "Baggies", or "Ziploc" bags are not permitted because they shrink prior to development of temperatures needed to ensure sprinkler activation and can interfere with proper operation. True cellophane bags and thin paper bags degrade rather than melt.


[NFPA 13-Section 6.2.6.4.2 (2013)]

Automotive Shops

#56. Welding Booth Exhaust –

Must have an exhaust directly to the outside of the building. “Portable vents” do not comply. All they do is scrub the air and then exhaust back into the room.

#57. Safety Glasses –

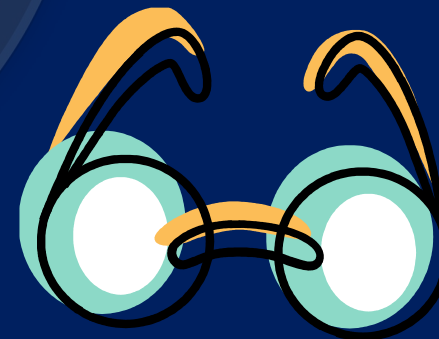

Bleachers and Grandstands

#63. Installation, Inspection and Maintenance –

Applies to indoor and outdoor bleachers and grandstands. Use matrix in the front of the Glossary to determine which standard or code applies to bleachers and grandstands (depends on the age).

Except for what is found on following slides this is not enforced by fire officials.

Bleachers and Grandstands

#64. Combustible Storage and Waste Accumulation –

Under bleachers and grandstands is not permitted.
Fire officials will be inspecting under bleachers and grandstands.

Bleachers and Grandstands

#65. Structures Underneath Grandstands such as Concession Stands, Snack Bars, Toilet Rooms, and Storage (IBC; NFPA 102)

IBC only: Where spaces under grandstands or bleachers are used for purposes other than ticket booths less than 100 ft² and toilet rooms, such spaces shall be separated by fire barriers with not less than 1-hour fire-rated construction.

Bleachers and Grandstands


#65. Structures Underneath Grandstands such as Concession Stands, Snack Bars, Toilet Rooms, and Storage (IBC; NFPA 102)

BOCA, 175, and 185 only: Accessory uses such as ticket booths, toilet facilities, or concession booths shall be permitted in such spaces where of noncombustible or fire-resistive construction. Concession booths of any construction are permitted if protected throughout with sprinklers or constructed using 1-hour fire-rated construction.

Boiler Rooms

#69. Door Swing –


Requirement unique to 175 and 185 only. Interior doors to heater and boiler rooms shall open into the room.

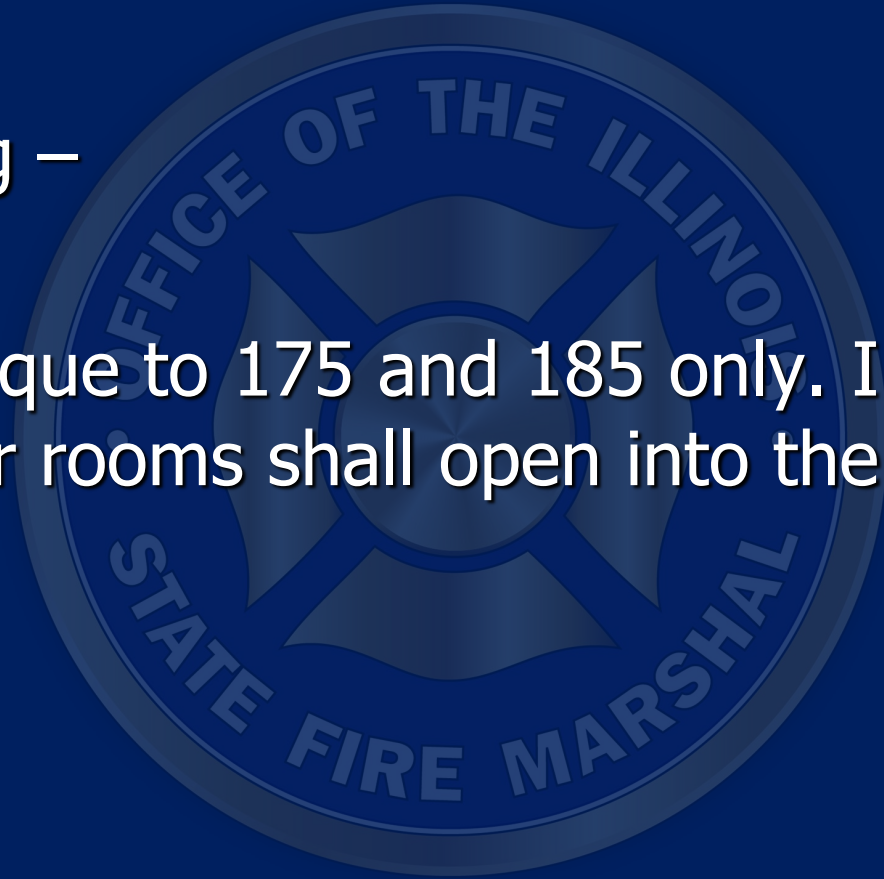

Boiler Rooms

#70. Maintenance of Fire-Rated Construction and Door Closers –

2-hour fire-rated construction = 1½-hour door

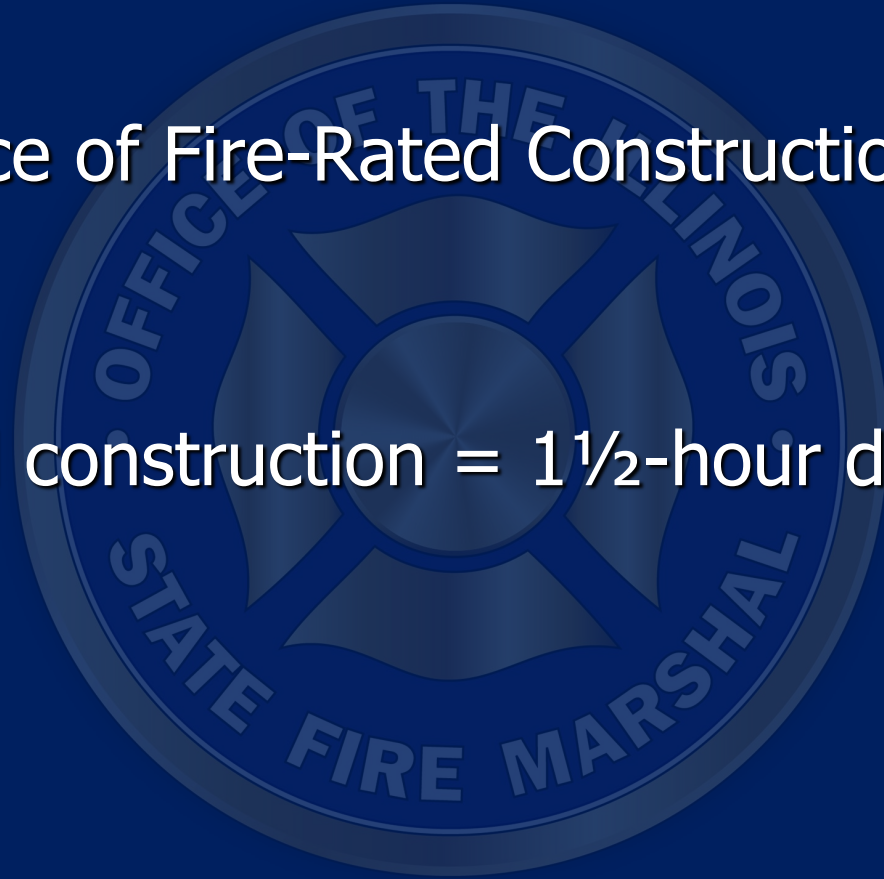

Boiler Rooms

#71. Housekeeping –


The boiler room should be kept free of all materials and equipment not necessary to the operations of the heating system.

IFC Boiler Rooms Only: Combustible storage of any kind is not permitted in boiler rooms.

Boiler Rooms

#72. Fire Detectors –

175/185 only and only if area is not sprinklered.

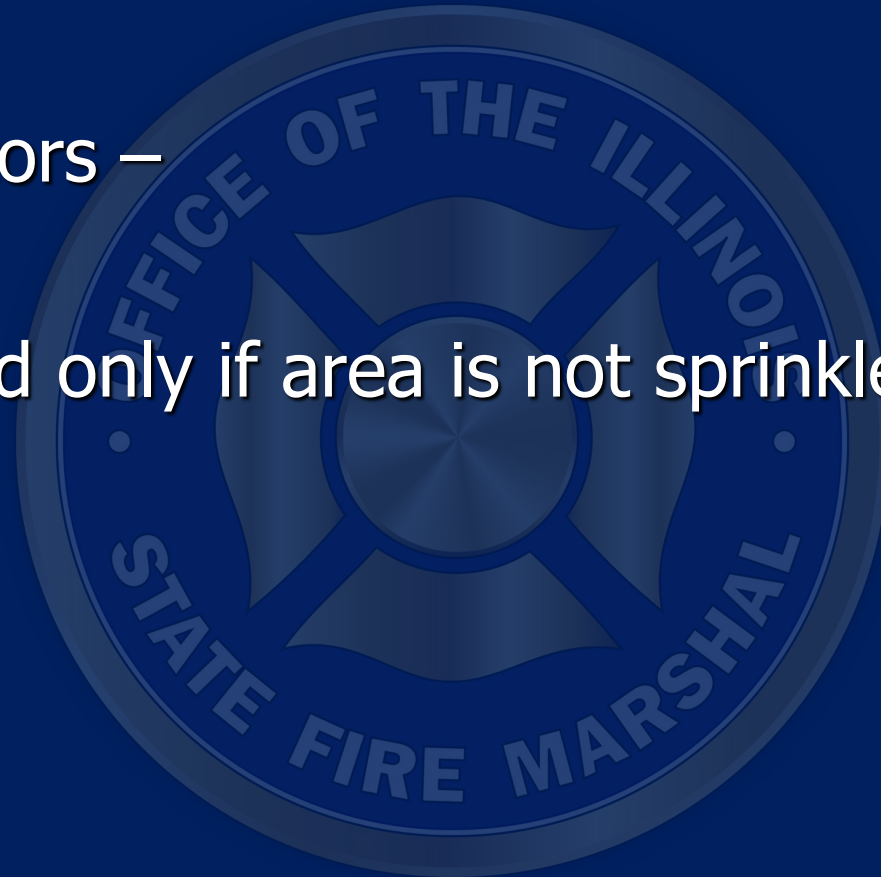

Boiler Rooms

#73. Emergency Fuel Burner Switch –


175/185 require that the emergency switch be located adjacent to the primary entrance door, between 6-7 ft. above the floor.

This switch also has to be painted red and labeled “Emergency Fuel Burner Switch.”

Boiler Rooms

#74. OSFM Certificate of Inspection Posted -


This certificate needs to be posted in a visible location in the boiler room and the certificate must be current.

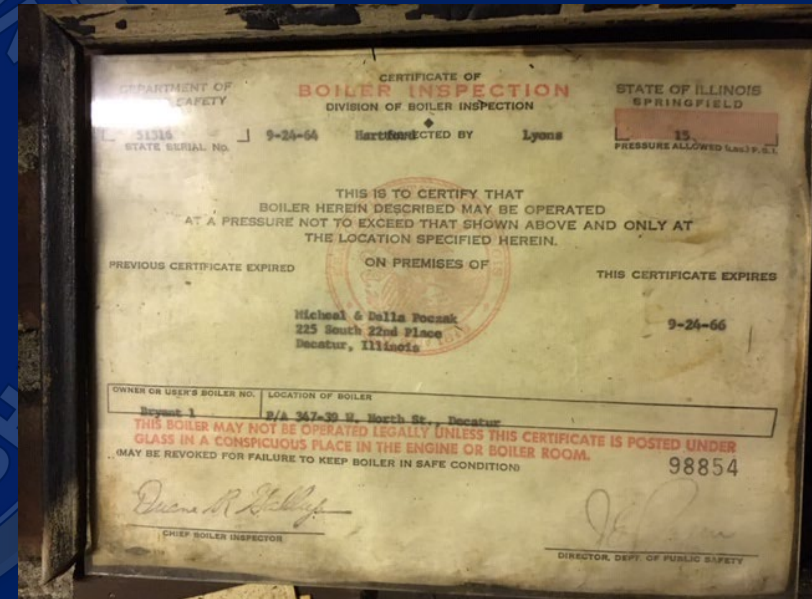


Cafeteria

- #80. Posted Occupant Load -
- #81. Number of Exits -
- #82. Means of Egress Arrangement -
- #83. Illuminated Exit Signs -
- #84. Emergency Lighting -

Cafeteria

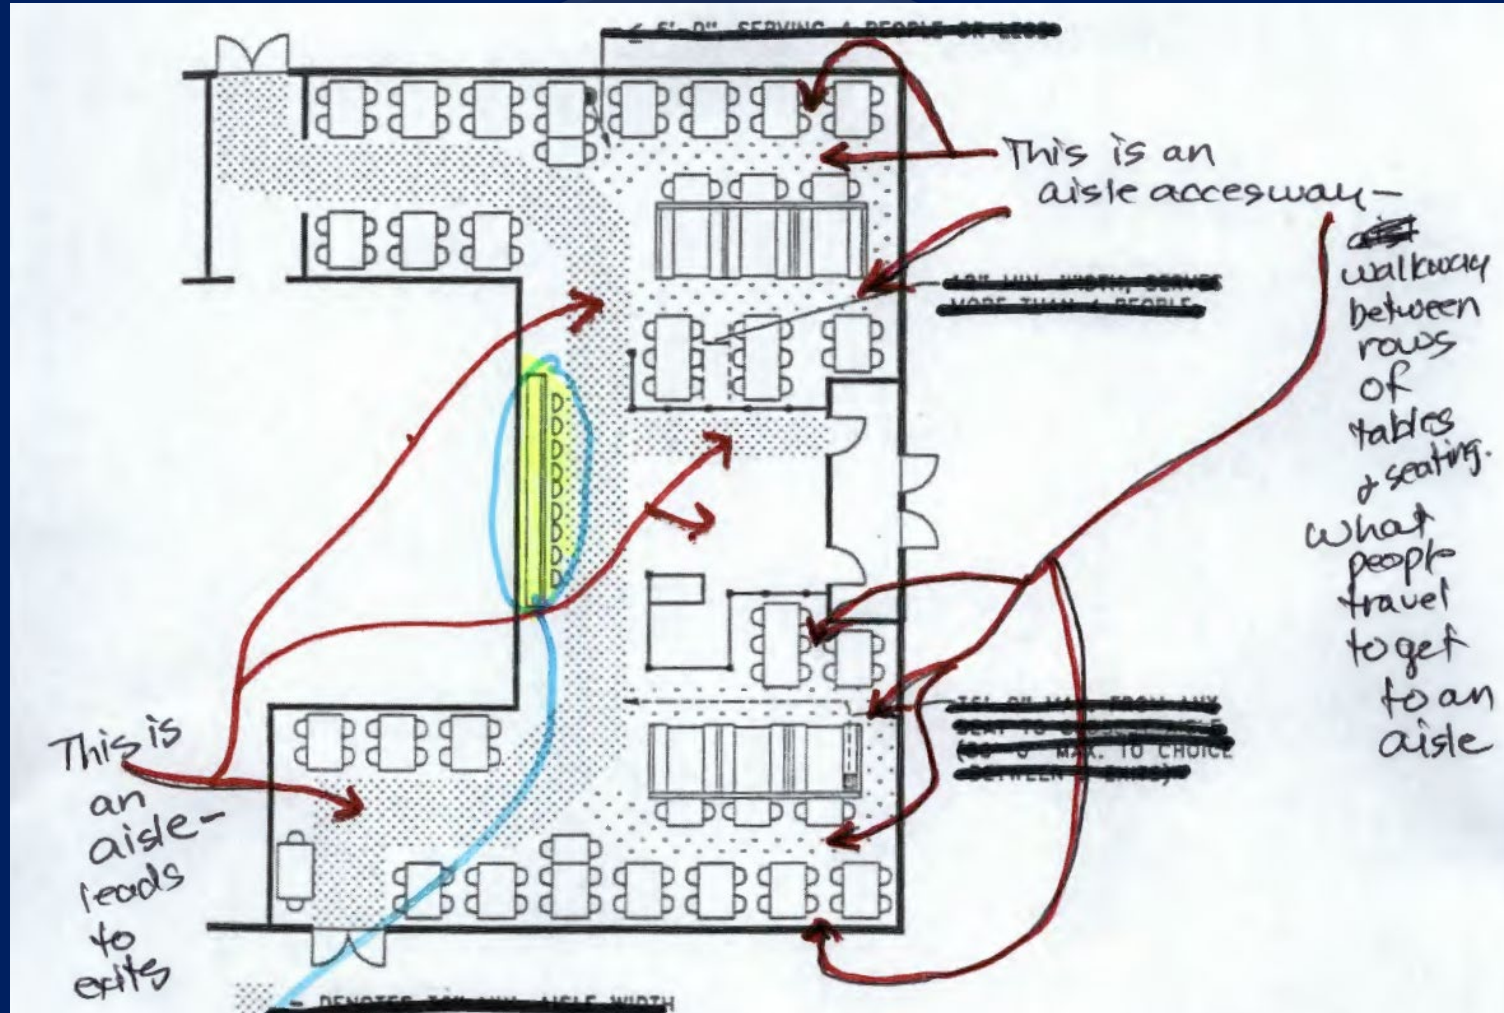

Cafeteria

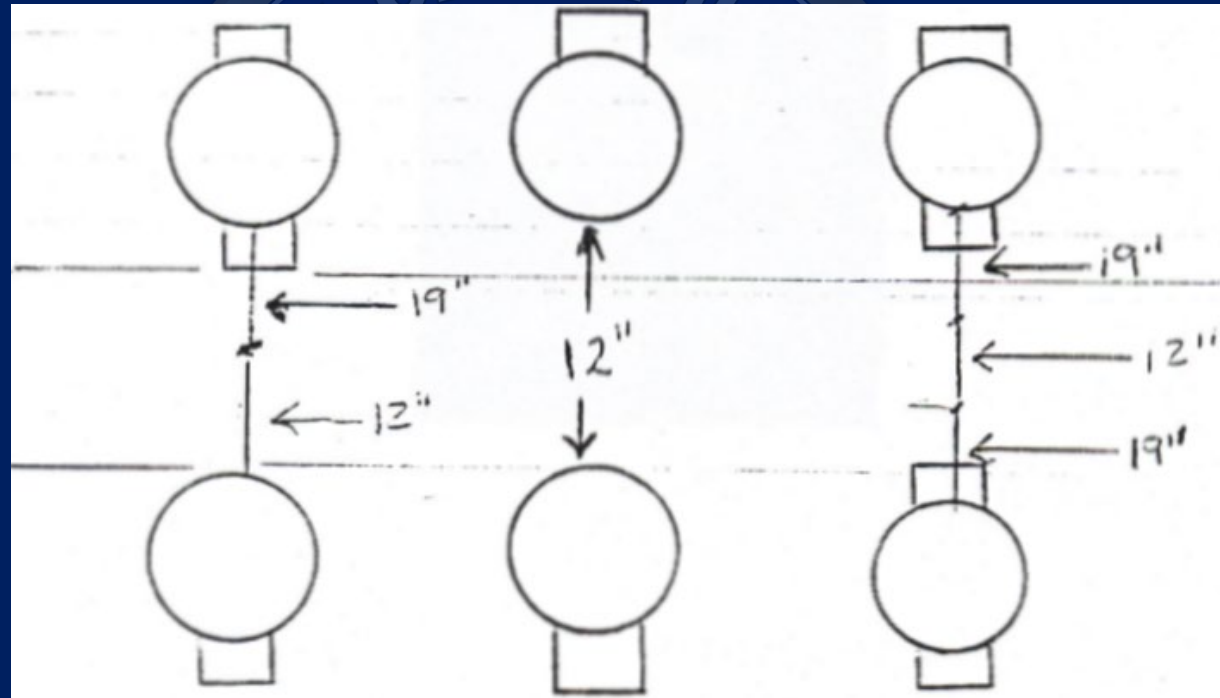

Cafeteria

#85. Maintenance of Fire-Rated Construction and Door Closers –

175/185 requires cafeterias to be enclosed with 1-hour fire-rated construction if the cafeteria has an occupancy load greater than 600.

Cafeteria

Part 175/185 only: Smoke or heat detectors are only required in assembly areas if the room or area has interior finish with flame spread > 75 and is not protected with sprinklers.

Classrooms

#94. Maintenance of Fire-Rated Construction –

Must comply with required fire-rating of the corridor. (See also #113)

Classrooms

#95. Door Glass-Vision Panel –

If glass is installed in a door located in a fire-rated wall, then the door has to be fire-rated and any glass within the door will have to be fire-rated as well.

Classrooms

#96. Classroom Door Swing –

Doors shall swing in the direction of egress travel:

IFC/BOCA: if serving > 50 persons

175/185: if serving > 20 persons

Classrooms

#97. Artwork in Classrooms-

For school buildings approved for design on or after July 1, 2016 only: Artwork and teaching materials shall be limited on walls of classrooms to not more than 50% of the specific wall area to which they are attached.

Corridors

- #108. Number of Exits -
- #109. Dead-End Travel -
- #110. Illuminated Exit Signs -
- #111. Emergency Lighting -
- #112. Fire Resistant Construction -

Corridors

Part 175 and beyond: Sprinklers = No corridor rating

Part 175 and beyond: If all rooms used for instruction have a direct exit to the outside.

Part 175 only: 1 story building

Corridors

Remember that any glass in a door that is required to be fire-rated or a wall that is required to be fire-rated must be approved for that assembly: Either tested/listed for the assembly or meets an exception in the applicable code.

Look for the symbol in the corner of the glass that identifies it as fire-rated glass

Corridors

Wired glass doesn't always cut it!

Tempered glass ≠ fire-rated!

But fire-rated tempered glass is available on the market.

Corridors

#113. Capacity and Width of Corridors –

Minimum clear width of corridors needs to be maintained, based on applicable code. Chairs, tables, vending machines, trophy cases, drinking fountains, etc. are allowed but shall not restrict this required width.

Corridors

#114. Storage in Corridors and Lobbies Not Permitted –

Storage in lobbies and corridors is normally not permitted unless the corridors and lobbies are protected with sprinklers or smoke detectors. Metal lockers may be used as long as the minimum required corridor width is not decreased.

Corridors

EXCEPT.....



Corridors

#114. Storage in Corridors and Lobbies Not Permitted –

175 permits coats or other clothing to be hung in an open corridor under certain prescribed conditions.

Corridors

#114. Storage in Corridors and Lobbies Not Permitted –

175 states that the hanging of clothing in corridors should be avoided. Where this is done, the width of the corridor shall be increased 15 inches on each side where cloaks are hung.

Corridors

#114. Storage in Corridors and Lobbies Not Permitted –

185 permits students' cloaks to be hung in the open on the side walls of corridors as long as the following criteria are met:

(see following slides)

Corridors

Part 185 continued:

- The resulting clear width of such corridors is not less than 85% of the minimum allowable clear width established by 185, and
- The uninterrupted length of cloaks hung along any corridor wall is not more than 25 ft. in an unsprinklered building or 40 ft. in a sprinklered building:

Such length shall be measured horizontally from one end of the cloak hanging hooks or bars to the other end...

Corridors

Continuity can be interrupted by a fire break consisting of a doorway or blank wall area not less than 36 in. in width or of a partition extending outward perpendicularly from the corridor wall not less than 12 inches and upwards from the floor to an elevation not less than 24 inches above the top of the cloaks.

This fire break partition, if provided, shall be considered in determining compliance with the limitations of the preceding paragraph.

Corridors

#115. Artwork –

Teaching material and artwork $\leq 20\%$ of corridor wall-

*******THIS ONLY APPLIES TO BUILDINGS APPROVED FOR CONSTRUCTION UNDER THE 2006, 2009 AND 2015 EDITIONS OF THE I-CODES*******

Corridors

#115. Artwork –



Elevators and Conveying Systems

#121. Does Not Obstruct Egress –

Typically, this is a problem found with chair lifts installed in stairways.

Elevators and Conveying Systems

#122. Certificate of Inspection –

Elevators must have a current inspection certificate. Generally displayed in elevator car but can be kept in the main office or the custodian's office.

Certificates also required for other conveying systems such as escalators.

Exterior Items

#123. Properly Installed and Maintained Exterior Stairs –

Installation will be approved at completion of work, but the inspector needs to visually inspect to check for signs of:

- Structural failure
- Clear and unobstructed, including snow, etc.

Exterior Items



Exterior Items

#124. Fire Lanes –

If the ROE makes the decision that a fire lane is needed, then it is required to be maintained, kept clear of obstructions (which includes parked cars that may impinge on required width of fire lane) and marked with appropriate signage.



Exterior Items

#125. Fire Department Connections –

Fire department connections shall be unobstructed and easily accessible.

Exterior Items

#126. Fire Hydrants – 425 ILCS 20

No object shall be constructed, maintained or installed within 48 inches of a fire hydrant. It shall be unlawful to install, maintain, construct or enlarge any barriers, trees, bushes, walls, or other obstacles which may hide or impede the use of a fire hydrant. Any fire hydrant installed or replaced after the effective date of this *Act* [1990] shall have a discharge that is maintained at least 14 inches, but not more than 26 inches, from the surface from which the hydrant protrudes.

Fire Escape Stairs

#128. Existing Fire Escapes –

Allowed to remain but cannot constitute more than 50% of the required exit capacity

185 - Only students aged 3rd grade and older are permitted on floors using fire escapes

Fire Escape Stairs

#128. Existing Fire Escapes –

Can be replaced with new fire escapes when the exterior of the building cannot be utilized due to:

- Lot lines
- Sidewalks
- Alleys/Roads

Fire Escape Stairs

#128. Existing Fire Escapes –

When permitted to be installed, new fire escape stairs cannot incorporate ladders or be accessed through windows.

Access to any fire escape cannot be through an intervening room.

Fire Escape Stairs

#130. Protection of Openings –

Except in buildings protected throughout with sprinklers, openings within 10 ft of a fire escape stair shall have a $\frac{3}{4}$ -hour fire resistance rating. (This also applies to exterior stairs).

Fire Escape Stairs

#131. Testing –

The AHJ can require testing or other evidence that an existing fire escape meets the requirements of the School Code.

Remember, the AHJ is the ROE.

Fire Escape Stairs



Greenhouses

This does not apply to the “greenhouse windows” commonly found in science laboratories that are installed as window systems. This applies to separate greenhouses or rooms that are glass-enclosed or plexi-glass/polycarbonate panel spaces with a controlled environment for growing plants, vegetables, and fruits out of season.



Greenhouses

#132. Maintenance of Fire-Rated Construction and Door Closers –

175/185 requires greenhouses to be separated from the attached school building by ¾-hour fire-rated construction.

Greenhouses

#133. Fire Alarm Systems –

Most greenhouses used at schools are considered a classroom setting and would therefore be required to have a fire alarm system.

- Pull stations
- Occupant notification

Greenhouses

#133. Fire Alarm Systems –

ISBE and the OSFM agree that there is nothing in the codes that requires the system found in the greenhouse to be connected to the fire alarm system used in the main school building, if the greenhouse is an independent building. No matter how close to main school building.

Greenhouses

#133. Fire Alarm Systems –

BUT...ISBE and the OSFM agree that if the school building is connected to a third-party monitoring company or a 911 center, then greenhouse fire alarm initiating devices are required to also send a signal to those monitoring organizations.

Greenhouses


#133. Fire Alarm Systems –

If the greenhouse is NOT used at all as a classroom setting (students have no need to enter the greenhouse), then a fire alarm system is not required as long as it is an independent building.

Greenhouses

#134. Fire Detectors —

175/185 only and only if area is not sprinklered.

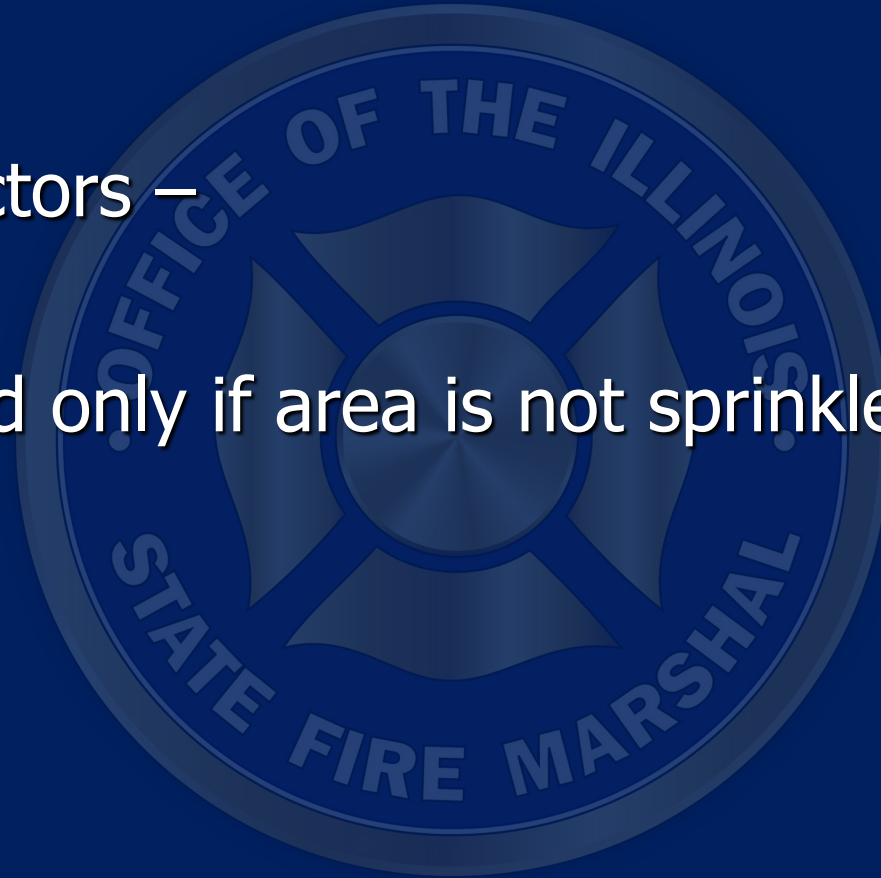

Gym and Multipurpose Rooms

- #138. Posted Occupancy Load -
- #139. Number of Exits -
- #140. Means of Egress Arrangement -
- #141. Illuminated Exit Signs -
- #142. Emergency Lighting -


Gym and Multipurpose Rooms

#143. Maintenance of Fire-Rated Construction and Door Closers –

175/185 requires that gyms and multipurpose rooms be enclosed with 1-hour fire rated construction if the occupancy load is greater than 600.

Home Economics and Family Services Rooms

These rooms are the cooking, sewing, and child care instructional rooms. These rooms contain domestic stoves, domestic laundry machines and sewing machines.

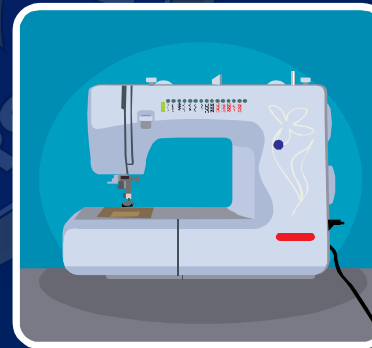

Home Economics and Family Services Rooms

If a school has a child care area, for purposes of vocational training for students, this child care center is not required to be licensed by the Illinois Department of Children and Family Services and is governed by the rules of ISBE, unless they have clients < 24 months of age. BUT our worry is not licenses.

Home Economics and Family Services Rooms

#151. Maintenance of Fire-Rated Construction and Door Closers – 175/185 requires ¾-hour

#152. Fire Detectors – 175/185 only and only if area is not sprinklered

#153. Exhaust Fan -

Industrial Technology Labs and Metal Working Shops

Unique hazards found in these areas:

- Scrap metal and fines
- Compressed gases
- Machining oils
- Open flame (welding)

Industrial Technology Labs and Metal Working Shops

- Proper storage of compressed gas
- Ongoing housekeeping
- Appropriate trash cans for oily rags
- Egress maintained

Industrial Technology Labs and Metal Working Shops

#161. Maintenance of Fire-Rated Construction and Door Closers – 175/185 requires 1-hour

#162. Fire Detectors - 175/185 only and only if area is not sprinklered

#163. Welding Booth Exhaust -

#164. Eye Glasses -

Kitchens

We are discussing the kitchens used to prepare meals for the students, unless the school has a vocational kitchen where commercial cooking is performed or there exists cooking with grease laden vapors.

This discussion does not include the typical home economics classroom.

Kitchens

#176. Maintenance of Fire-Rated Construction and Door Closers –

175/185 requires ¾-hour. This is different than what we are used to enforcing in the model codes.

#177. Fire Detectors –

175/185 only and only if area is not sprinklered

Kitchens

#178. Fire Extinguishers –

Schools will be required retroactively to provide at least one fire extinguisher within 30 ft. of the commercial cooking equipment.

Kitchens

#178. Fire Extinguishers —

These fire extinguishers are required to be compatible with the fire suppression agent used in the cooking hood.

Cooking equipment involving vegetable or animal oil shall be protected using a Class K extinguisher.



Kitchens

#179. Cooking Hood Exhaust –

Commercial cooking appliances must be protected with an approved commercial kitchen exhaust hood and duct system.

International Mechanical Code

BOCA National Mechanical Code

Kitchens

#180. Regular Inspection and Cleaning of Cooking Hood Exhaust System –

The codes do not identify specific time periods but base the frequency on what is needed to prevent the accumulation of grease.

Look for a sticker placed on the outside edge of the hood canopy or for paperwork if cleaning company doesn't use stickers.

Kitchens

#181. Filter Installation and Maintenance –

Filters are part of the grease collection system. It becomes pretty obvious when they are not being cleaned on a regular basis.

Kitchens

#181. Filter Installation and Maintenance –

- Listed
- Constructed of steel or listed equivalent
- Rigid construction
- Mesh filters are not permitted unless listed for use in hoods
- Installed at an angle $\geq 45^\circ$ from the horizontal



Kitchens

#182. Cooking Hood Extinguishing Systems –

All existing extinguishing systems will need to be listed under UL 300, which means they should be a wet chemical system. Currently there are no dry chemical systems that are listed under UL 300.

Kitchens

#182. Cooking Hood Extinguishing Systems –

Systems must be inspected every 6 months and a service tag should be found on the remote pull station or on the extinguishing agent tank.

This work must be performed by a fire equipment contractor that is licensed with OSFM.

Library and Media Centers

- #189. Posted Occupant Loads -
- #190. Number of Exits -
- #191. Means of Egress Arrangement -
- #192. Illuminated Exit Signs -
- #193. Emergency Lighting -
- #194. Maintenance of Fire-Rated Construction and Door Closers – 175/185 requires 1-hour (if O.L. > 600)

Library and Media Centers

Part 175/185 only: Smoke or heat detectors are only required in assembly areas if the room or area has interior finish with flame spread > 75 and is not protected with sprinklers.

Mechanical Rooms

#198. Maintenance of Fire-Rated Construction and Door Closers – See Appendix O, P, or Q for the various types of mechanical rooms and their separation requirements

#199. Fire Detectors – Part 175/185 only

Mechanical Rooms

#200. Storage of Combustibles-

Clearances to combustible materials shall be maintained so the operation of furnaces and other gas appliances will not create a hazard to persons or property.



Mechanical Rooms

#200. Storage of Combustibles-

A minimum clearance is required to permit maintenance and inspection of equipment.

Music Practice Rooms

#202. Sound Proofing Used As Wall Covering –

Refer to interior finish requirements



Photo Developing Rooms

This applies only to labs that are still using film and chemicals. Does not apply to digital photo processing:

#208. Maintenance of Fire-Rated Construction and Door Closers – 175/185 requires ¾-hour

#209. Fire Detectors - 175/185 only and only if area is not sprinklered

#210. Exhaust Fan –


#211. Chemicals – See Appendix B

Science Laboratories

#225. Maintenance of Fire-Rated Construction and Door Closers – 175/185 requires ¾-hour

#226. Fire Detectors -

#227. Exhaust Fan -

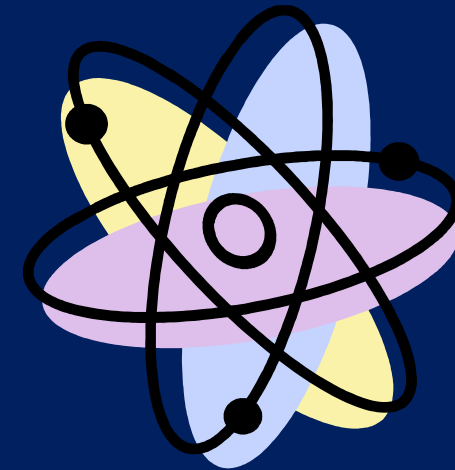

Science Laboratories

#228. Fume Hood Exhaust –


A fume hood exhaust needs to be provided when the mixing of chemicals occurs. This must exhaust directly to the outside. There are no ITM requirements for fume hoods.

These booths should not be used for storage, which is a commonly found violation.

Science Laboratories

#229. Safety Glasses –

#230. Chemicals – See
Appendix B

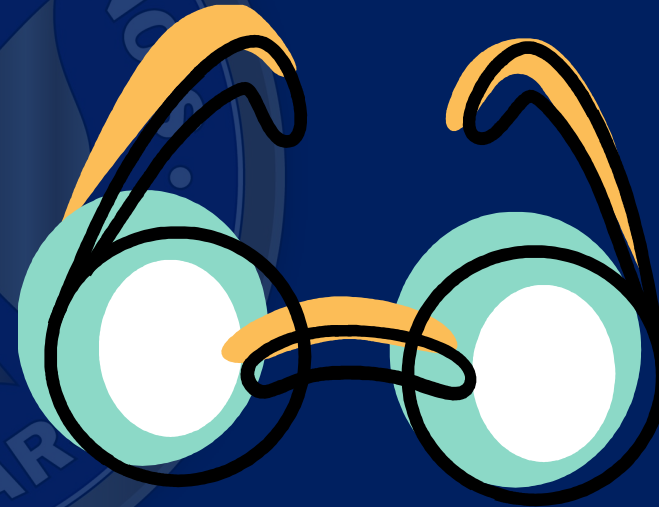

Science Laboratories

#231 Emergency Fuel Burner Switch-

ICC Fuel Gas Code (2009 + 2015) 409.6 Shutoff valve for laboratories. **This applies only to schools approved for design on or after January 1, 2010.**

Shower and Locker Rooms

#235. Number of Exits -

#236. Illuminated Exit Signs/Emergency Lighting-

#237. Exhaust Fan/Ventilation – not checked by fire service personnel

#238. Vapor-Proof Lights – not checked by fire service personnel

Stages (Large,) Dressing Rooms and Other Accessory Areas

These requirements pertain to those stages with overhead hanging curtains, drops, scenery or stage effects other than lighting and sound; or a stage where the distance between the top of the proscenium opening and the ceiling above the stage is > 5 ft or the stage height is > 50 ft.

Generally, these stages are only found in high schools.

Stages (Large,) Dressing Rooms and Other Accessory Areas

#243. Illuminated Exit Signs -

#244. Emergency Lighting -

#245. Maintenance of Fire-Rated Construction and Door Closers – 175/185 requires 1-hour proscenium separation. Newer schools may be required to have a 2-hour separation.

Stages (Large,) Dressing Rooms and Other Accessory Areas

#246. Proscenium Wall Protection –

The proscenium wall is the wall that separates the stage and backstage areas from the audience. This wall is required to be fire-rated.

The proscenium curtain is part of the proscenium wall protection system.

Stages (Large,) Dressing Rooms and Other Accessory Areas

#246. Proscenium Wall Protection –

A properly designed deluge sprinkler system is permitted in lieu of a proscenium curtain.

See Appendix E for recommended practice for proscenium curtains, except for those installed under the 2009 + 2015 edition of IBC.

Stages (Large,) Dressing Rooms and Other Accessory Areas

#247. Curtains and Scenery –

Must resist the spread of flame. There should be a current label attached to curtains used on stages.

Stages (Large,) Dressing Rooms and Other Accessory Areas

#248. Sprinkler Systems and Ventilators –

Stages which are equipped with fly galleries, gridirons, and rigging for movable theater-type scenery shall be protected with sprinklers.

In most cases, even existing stages!

Stages (Large,) Dressing Rooms and Other Accessory Areas

#248. Sprinkler Systems and Ventilators –
Stages and enclosed platforms > 500 ft² are required to have a ventilator(s) that is:

- Manually operated from the stage floor, and
- Automatically operated by fusible links or approved heat actuating devices

Stages (Large,) Dressing Rooms and Other Accessory Areas

#249. Standpipes for Stages –

For schools contracted for design on or after July 1, 1965 but before March 24, 1995 are required to have a standpipe. For schools contracted for design on or after March 24, 1995, stages > 1,000 ft² are required to have a standpipe.



Stages (Small)

These requirements apply to those smaller stages found in your typical grade school and middle school. Scenery is still used but not hung from the professional rigging systems found in the Large Stages. The stage ceiling is not > 5 ft. above the proscenium opening.

Stages (Small)

#256. Illuminated Exit Signs -

#257. Emergency Lighting -

#258. Curtains and Scenery -

#259. Fire Detectors –

175/185 only and only if area is not sprinklered

Stages with Storage Underneath

#265. Maintenance of Fire-Rated Construction and Door Closers –

IFC 2003/2006/2009/2015

1-hour fire rated construction with doors that are N/C construction or 1¾" SC with closer and latch. Exception is only if area under stage is used for noncombustible storage. If this is a legitimate stage this area is required to have sprinklers and the minimum enclosure requirements are not required

Stages with Storage Underneath

BOCA 1996

No sprinklers required if space is < 4 ft. in height

Used exclusively for storage of tables and chairs

Enclosed with 5/8" Type X gypsum

With sprinklers, no minimum enclosure requirements

Stages with Storage Underneath

BOCA 1993

No sprinklers required is enclosure and supporting structure is 1-hour fire-rated, which means $\frac{3}{4}$ -hour door with closer and latch.

With sprinklers, no minimum enclosure required

Stages with Storage Underneath

Parts 175/185

With sprinklers enclosing construction must be 1/2-hour fire rated or N/C construction

Without sprinklers enclosing construction must be 1/2-hour fire rated construction

Stages with Storage Underneath

Parts 175/185

In all cases doors shall be of hollow metal or solid core wood construction and shall be always maintained locked when such rooms are not in actual use or shall be provided with automatic self-closing devices.

Stages with Storage Underneath

#267. Fire Detectors –

175/185 requires smoke or heat detectors in storage areas located below stages, if they are not protected with sprinklers.

#268. Sprinklers – (see Glossary)

Stairwells

#272. Properly Maintained Stairs –

185 requires non-slip treads on all stairs located within a means of egress.

Stairwells

#273. Illuminated Exit Signs -


#274. Emergency Lighting -

#275. Interior Exit Stair Enclosure -

Stairwells

#276. No Storage Under Stairs –

Stairwells are not storage rooms!
There should be no storage of
any kind within a stairwell.

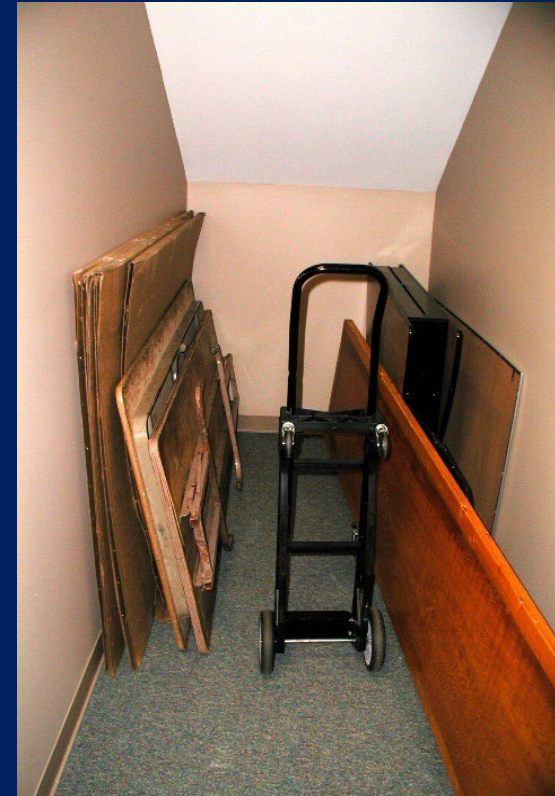


Stairwells

It is permissible to create an enclosed storage room under stairs under the following conditions:

- Separation from stair structure and stairwell itself by 1-hour fire-rated construction
- Access to storage room is not from within the stairwell.
- Fire detection is provided if room is not protected with sprinklers.

Stairwells

#276. Exception

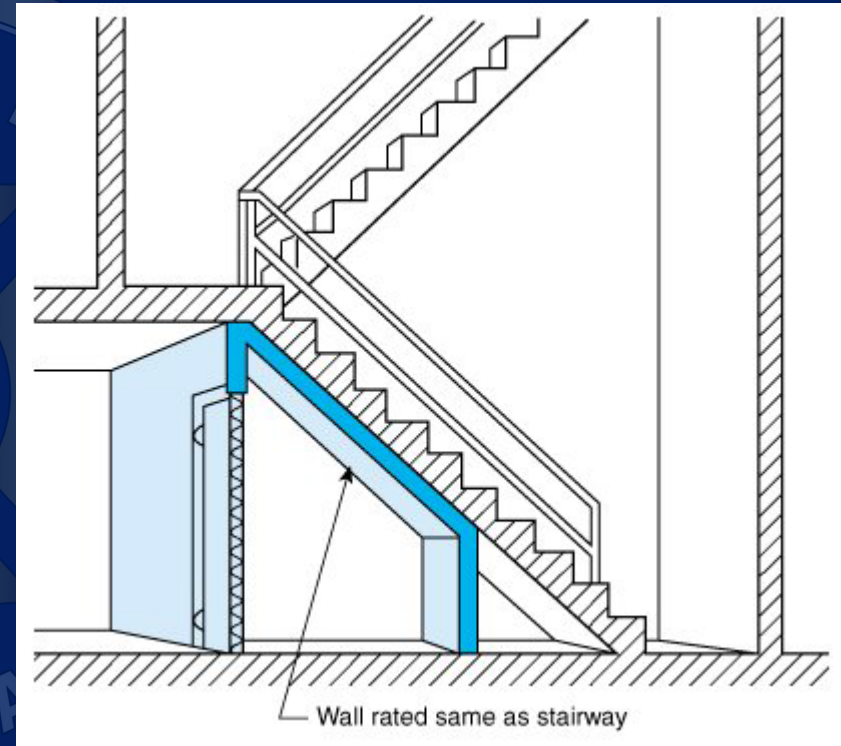

Stairwells

#277. Fire Detectors –

185 requires that fire detectors (smoke or heat) be provided at the top of stairwells that are not protected with sprinklers.

Storage

#283. Maintenance of Fire-Rated Construction and Door Closers – See Appendix O, P, or Q.

#284. Fire Detectors –
175/185 only and only if area is not sprinklered.

Swimming Pools

When serving as an assembly use:

#289. Posted Occupant Loads -

#290. Number of Exits -

#291. Means of Egress Arrangement -

#292. Illuminated Exit Signs -

#293. Emergency Lighting -

Swimming Pools

#294. Maintenance of Fire-Rated Construction and Door Closers – 175/185 requires 1-hour if > 600 occupants

#295. Vapor-Proof Lights - Fire service will not be required to look at these fixtures

Swimming Pools

#296. Exhaust Fan –

Fire service will not be required to check for this.

#297. IDPH Safety Equipment –

This item falls under the jurisdiction of the Illinois Department of Public Health. Fire department, fire protection district and OSFM inspectors will not be required to review or enforce this.

(Title 77 Ill. Adm. Code 820.310)

Swimming Pools


#298. Fire Extinguishers –

If a fire extinguisher is provided in the pool area, only water fire extinguisher are permitted in areas containing oxidizers such as pool chemicals.



Teacher's Workrooms and Lounges

If it is starting to look like a kitchen with cooking (beyond microwaves and coffee pots) then it should be protected as a kitchen.

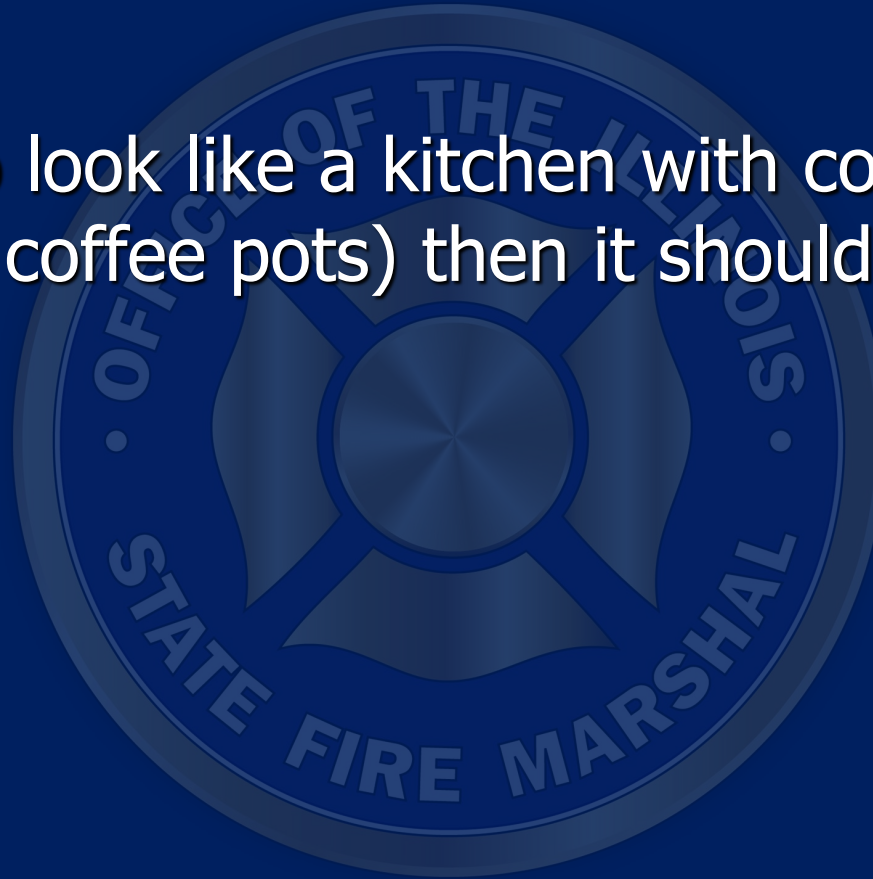

Teacher's Workrooms and Lounges

#301. Maintenance of Fire-Rated Construction and Door Closers – 175/185 requires ¾-hour

#302. Fire Detectors - 175/185 only and only if area is not sprinklered and only in those lounges where there are cooking or heating appliances

Time-Out Rooms

#304. Ceiling Height –

Time-out rooms ceiling height shall be the same as surrounding rooms.

Room shall be large enough to accommodate student and another person required to accompany student.

Time-Out Rooms

#305. Safe Construction –

Constructed using materials that will not harm and so that the student cannot climb the wall.

Viewing panels – Fire-rated construction?

Padding – Interior finish requirements

Time-Out Rooms

#306. Locking –

306. Locking [105 ILCS 5/10-20.33(d); 23 Ill. Adm. Code 1.285(a)(4)(E)]

The use of any of the following rooms or enclosures for an isolated time out or time out purposes is prohibited:

- 1) Any room with a door fitted with a locking mechanism.
- 2) Any room that is physically blocked by furniture or any other inanimate object at any time during the isolated time out or time out.
- 3) A confining space such as a closet or box.
- 4) A room where the student cannot be continually observed.
- 5) Any other room or enclosure or time out procedure that is contrary to current rules adopted by the State Board of Education.

Time-Out Rooms


#306. Locking –

The door shall not be fitted with a locking mechanism (except as described above) or be physically blocked by furniture or any other inanimate object at any time during the time out.

Time-Out Rooms

#307. Monitoring –


Any enclosure for isolated time out shall be designed to permit continuous visual monitoring of and communication with the student.

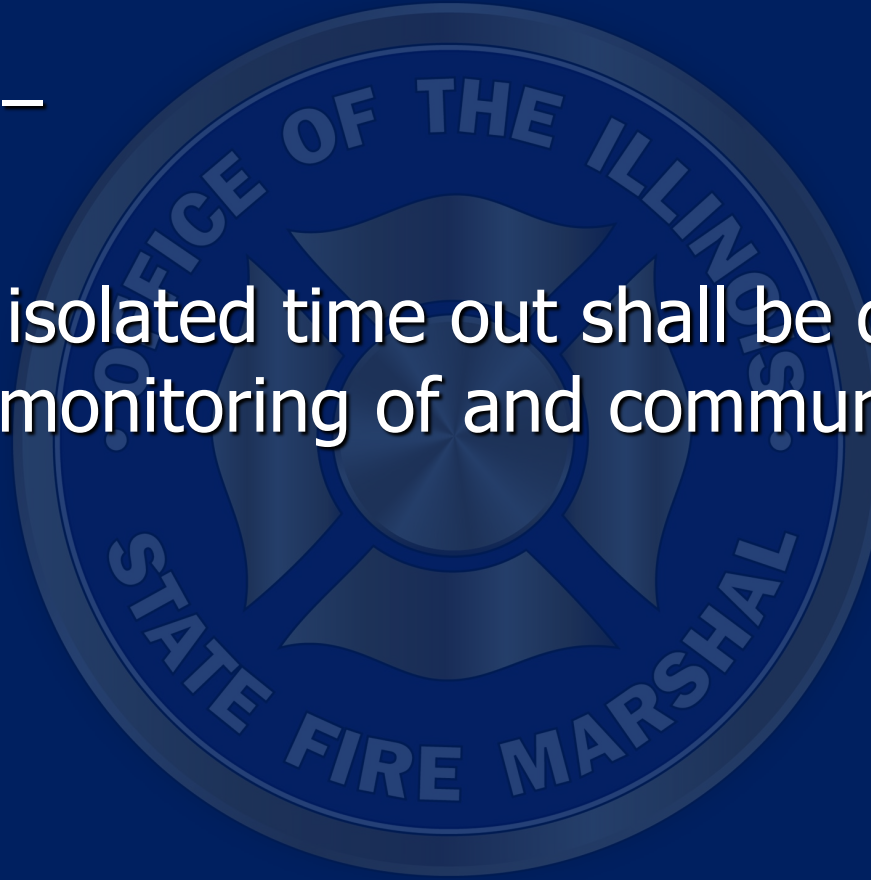

Toilet Rooms

#309. Exhaust Fan –

Fire service will not be required to check for this.

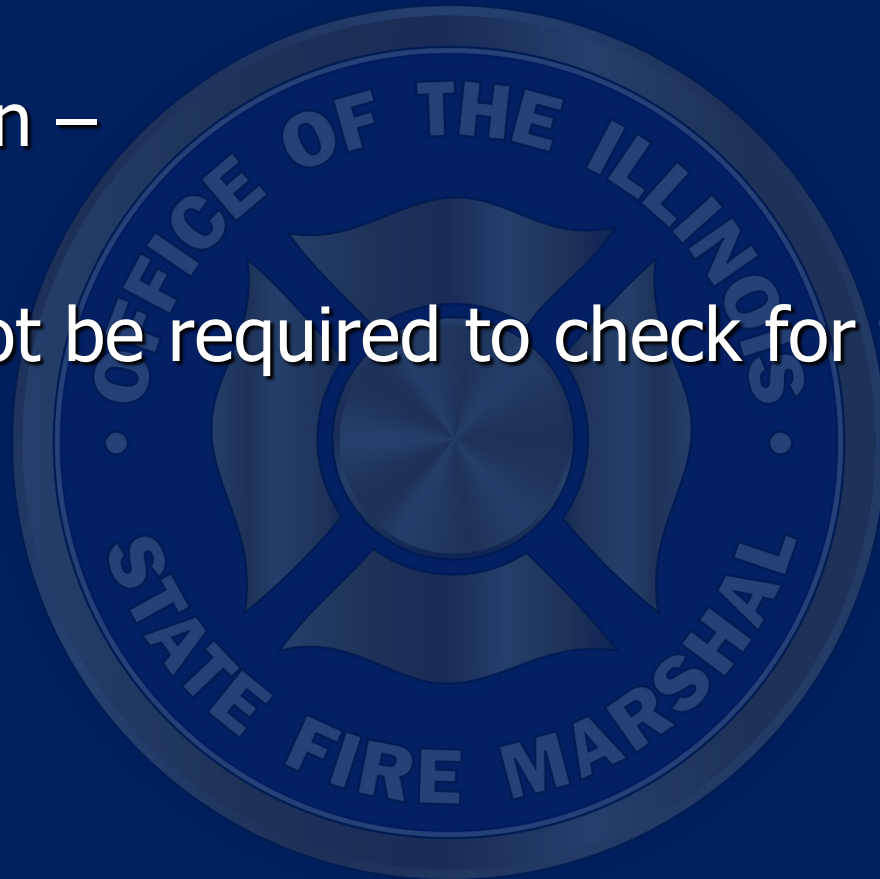

Woodworking Shops

#315. Maintenance of Fire-Rated Construction and Door Closers - 175/185 requires 1-hour.



Woodworking Shops

#316. Fire Detectors –
175/185 only and only if area is not sprinklered

#317. Fire Extinguishers –

A fire extinguisher suitable for Class A fires is required to be installed within 50 ft. of any machine producing shavings or sawdust. Shall be serviced by a contractor licensed by OSFM and display a current inspection tag.

Woodworking Shops

#318. Sawdust Collector and Exhaust –

This system is required and should be installed in accordance with the applicable code (International Fire Code or BOCA National Fire Prevention Code).

Collection device should be emptied regularly or upon need.

Woodworking Shops

#319. Eye Glasses




#320. Housekeeping – Provisions shall be made for the systematic, thorough cleaning of the woodworking area at sufficient intervals to prevent the accumulation of combustible dust and spilled combustible flammable liquids (if used).




Appendix A

Code References and Acronyms

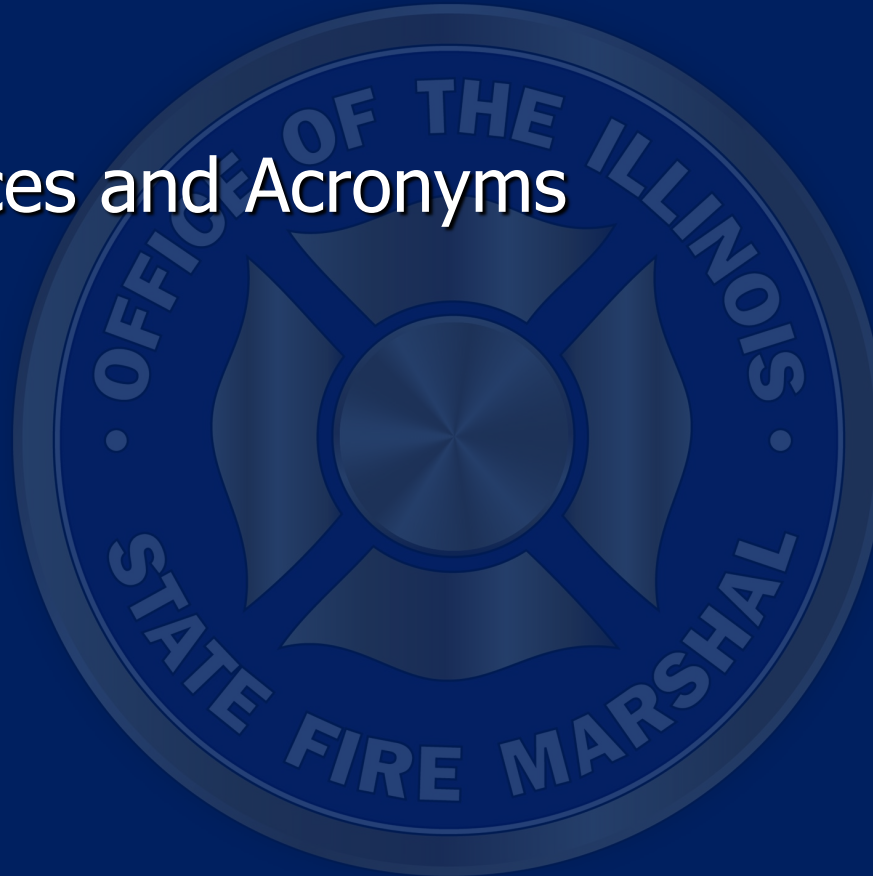


Appendix B

Storage/Handling of Flammable and Combustible Liquids and Other Chemicals

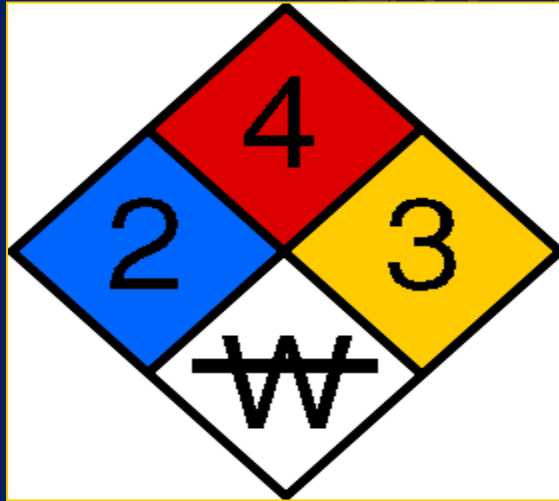

Appendix C

Fire Alarm Inspection, Testing, and Maintenance

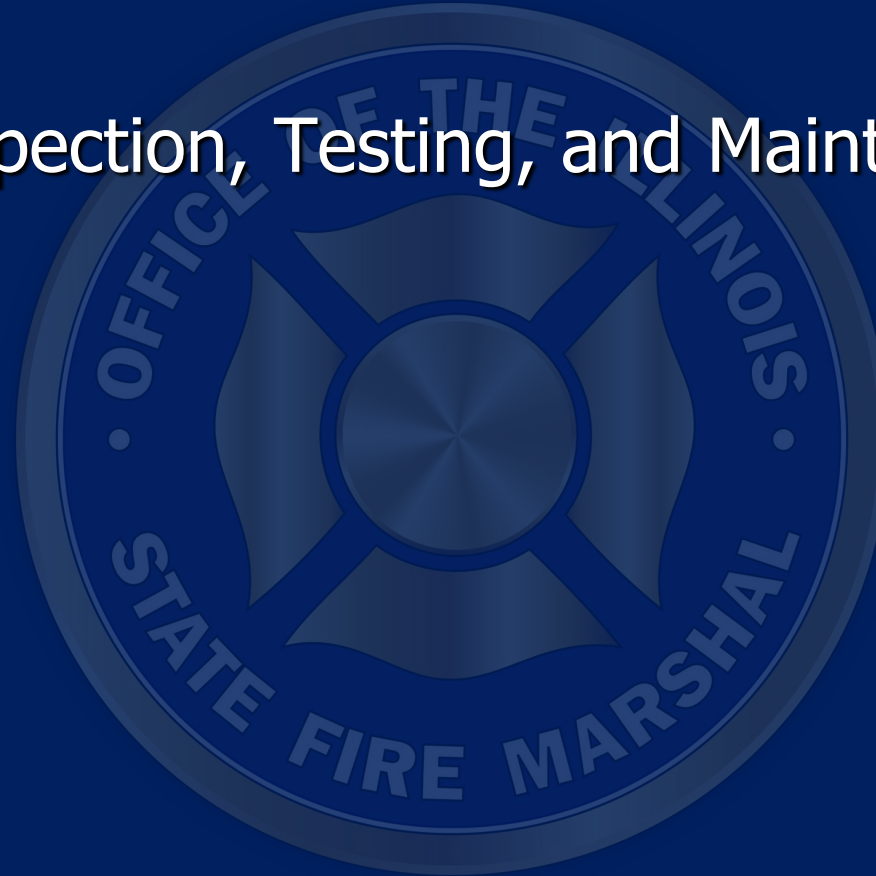

Appendix D

Fire Extinguisher Matrix-NFPA 10: 2007 per OSFM's Part 251 rules.



Appendix E

Periodic Inspection and Testing of Proscenium Curtains
(guideline only, except for those curtains installed
under the 2009 + 2015 IBC)

NFPA 80 – 2007 + 2013 editions

Appendix F


Periodic Testing of Emergency Lighting Equipment



Appendix G

Dead-End Travel Matrix


From BOCA Fire (1993 + 1996) and IFC (2003 + 2006 + 2009 + 2015)

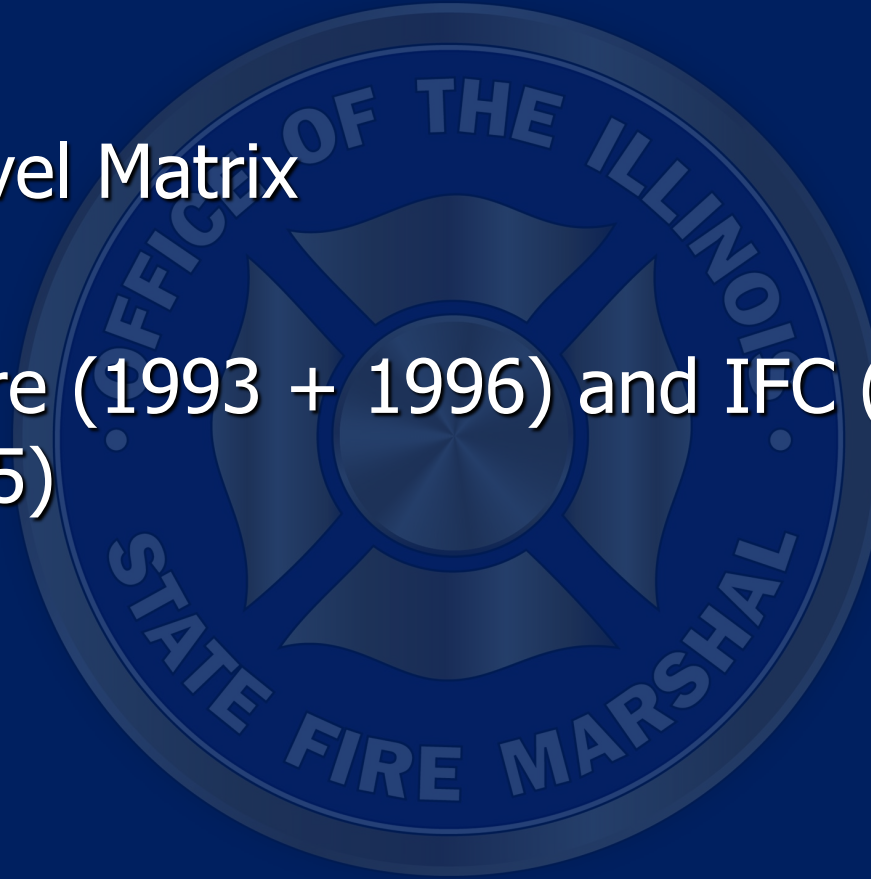

Appendix G



Appendix G

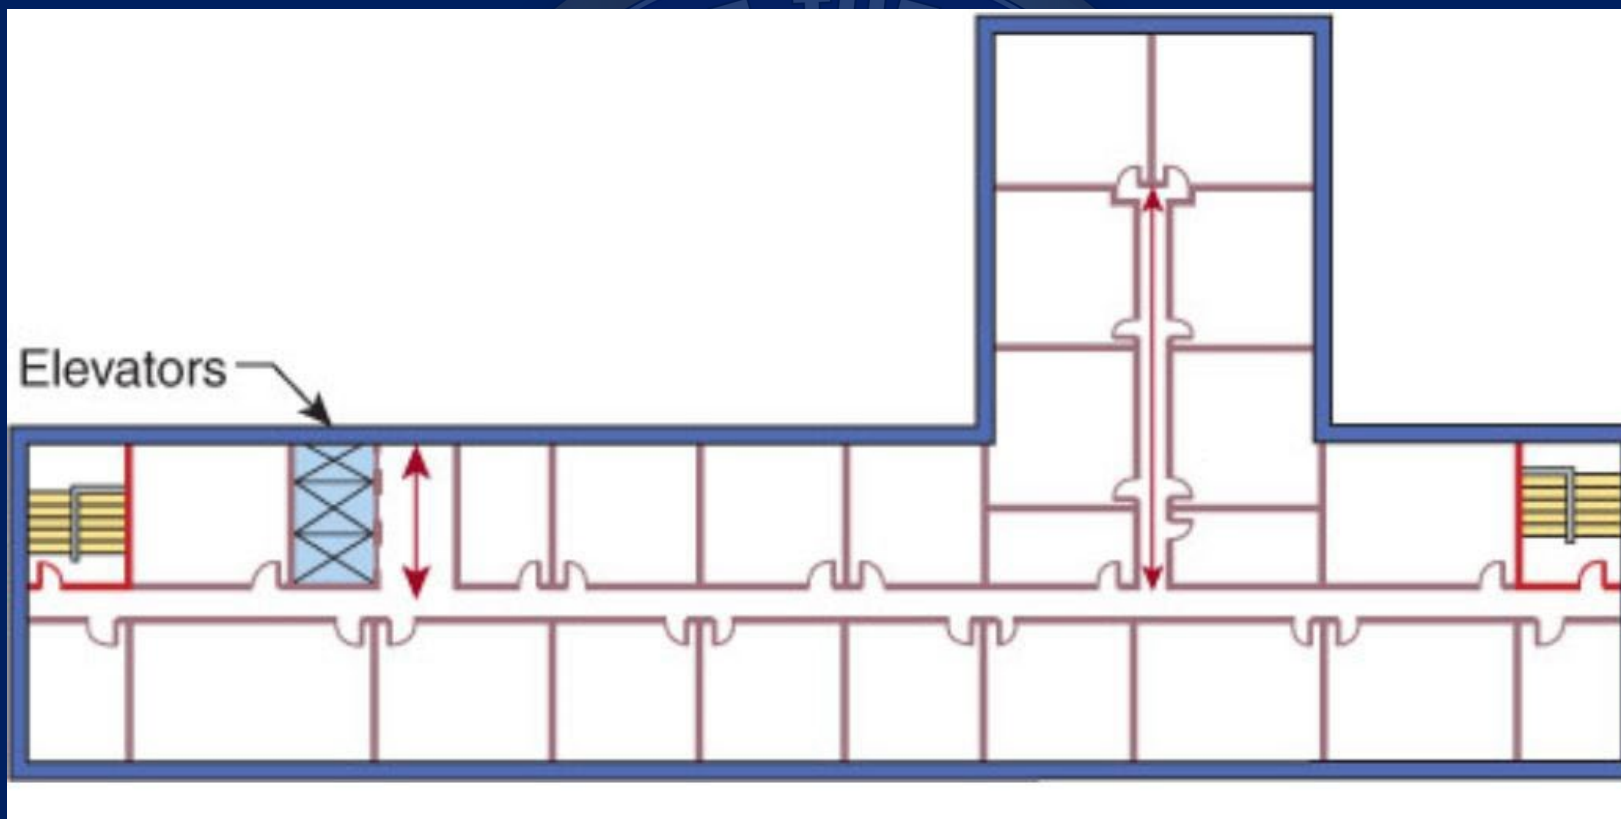


Appendix H

Wall-Mounted Alcohol-Based Hand-Rub Dispensers



Appendix I

Decorative Vegetation

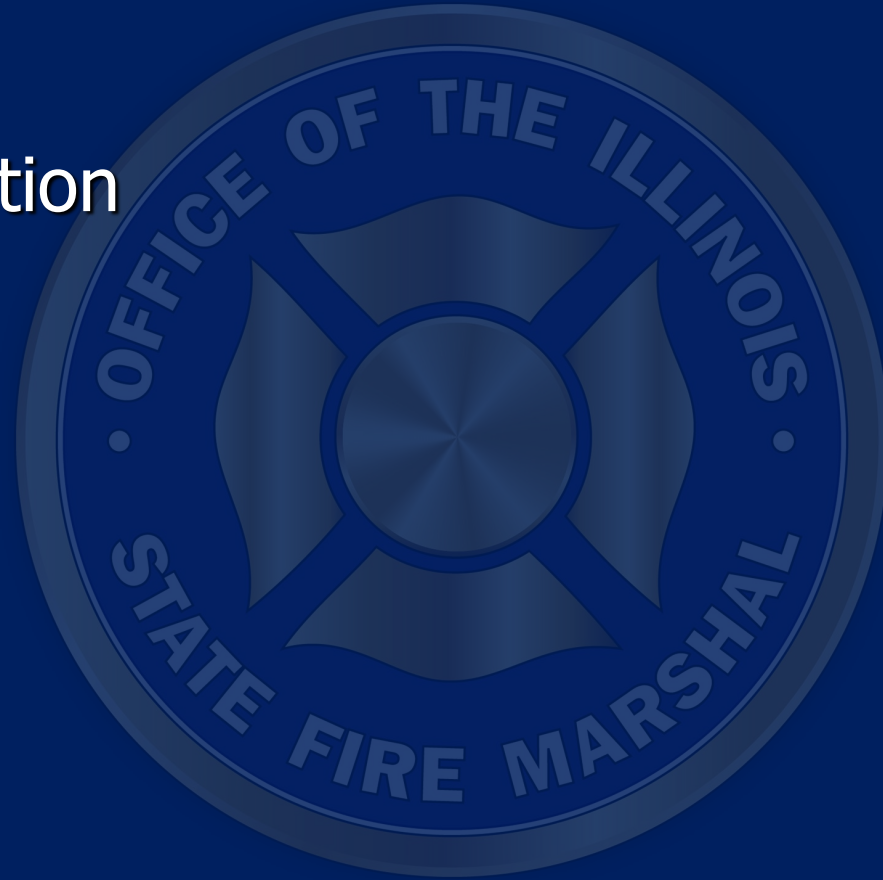

Appendix J

Manual Fire Alarm Pull Stations




Appendix K

Health/Life Safety Annual Inspection Checklists



Appendix L

Interior Wall, Ceiling, and Floor Finish

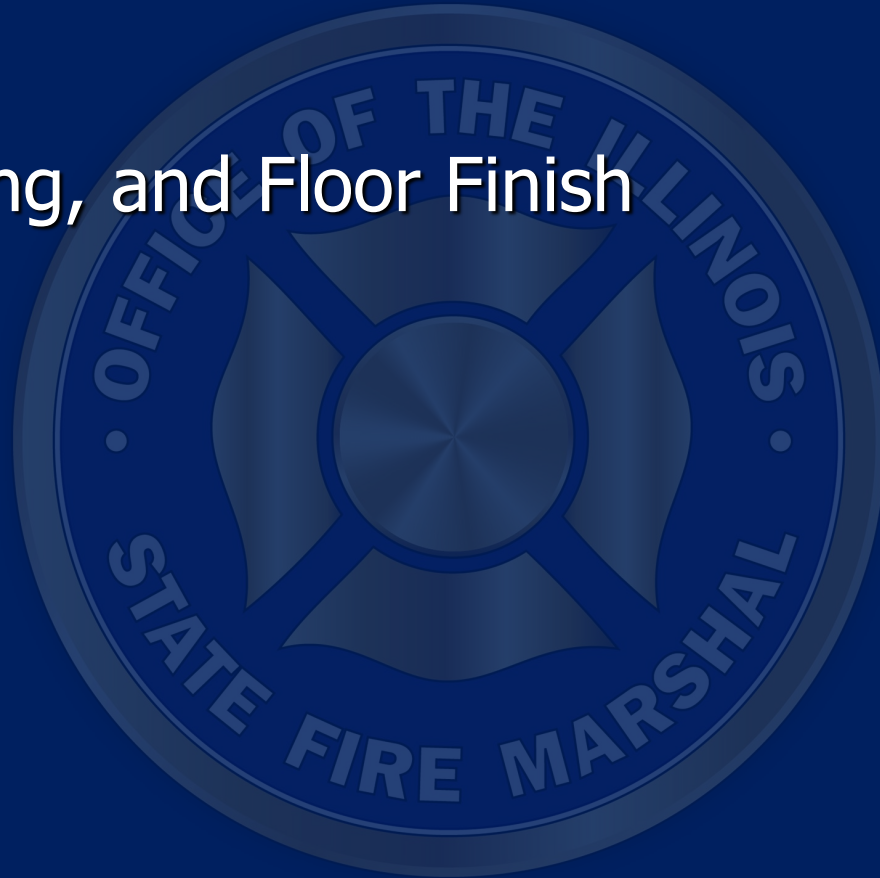

Appendix M

Clearance from Sprinkler Heads



Appendix N

Door Locking Hardware



Appendix O

Part 175 Fire Rated Separations



Appendix P

Part 185 Fire Rated Separations



Appendix Q

Part 180 Fire Rated Separations

Includes BOCA 1993 + 1996

Includes ICC 2003 + 2006 + 2009 + 2015



The End

The seal of the Office of the Illinois State Fire Marshal is centered on the slide. It features a Maltese cross with a central circle, surrounded by the text "OFFICE OF THE ILLINOIS STATE FIRE MARSHAL".

Any questions?